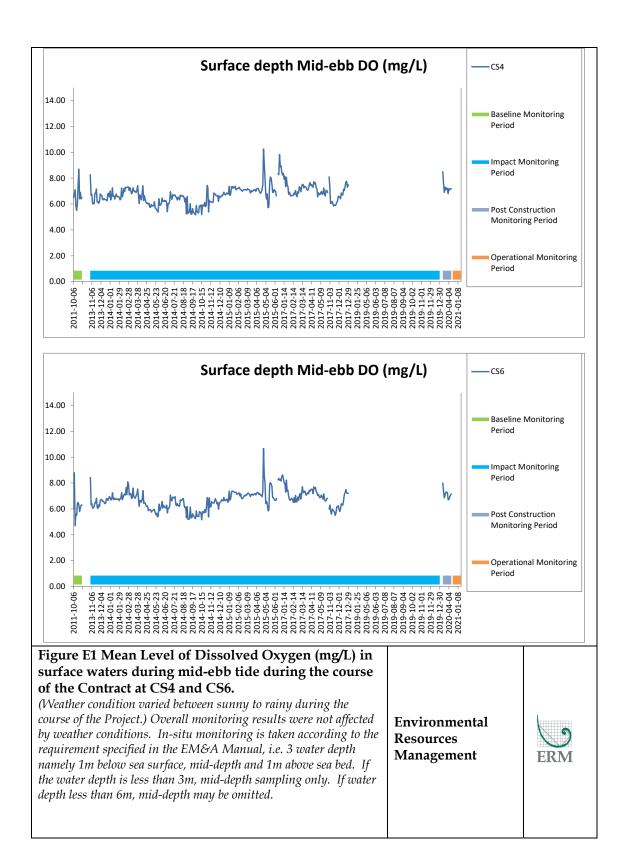
Appendix E

Impact Water Quality
Monitoring Results, PostConstruction Water Quality
Monitoring Results and
Operational Phase Water
Quality Monitoring Results



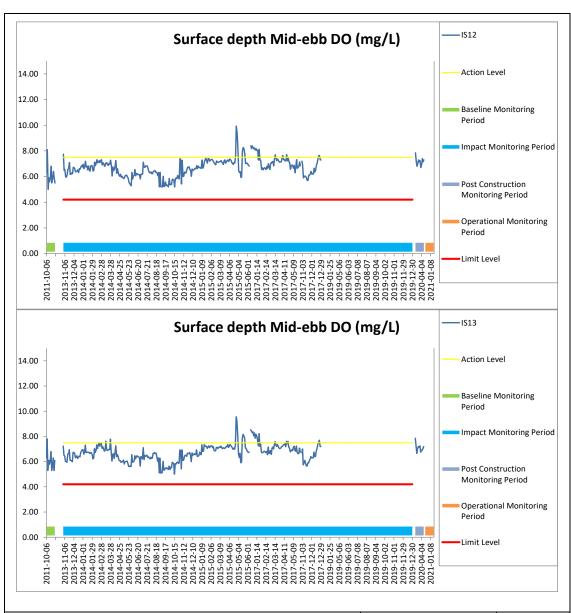


Figure E2 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-ebb tide during the course of the Contract at IS12 and IS13.



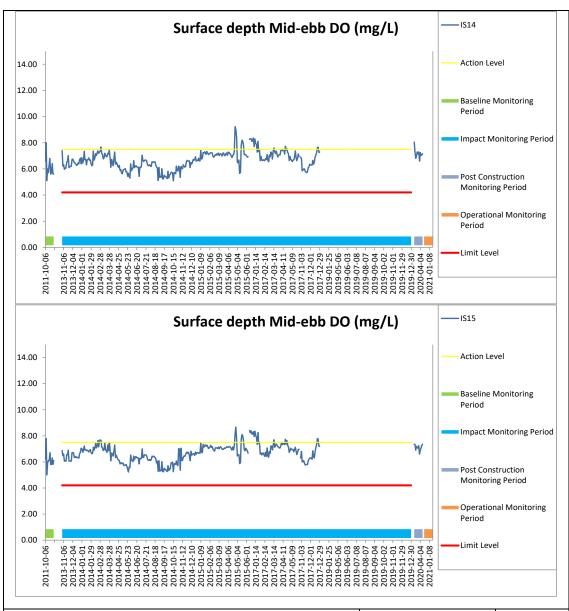


Figure E3 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-ebb tide during the course of the Contract at IS14 and IS15.



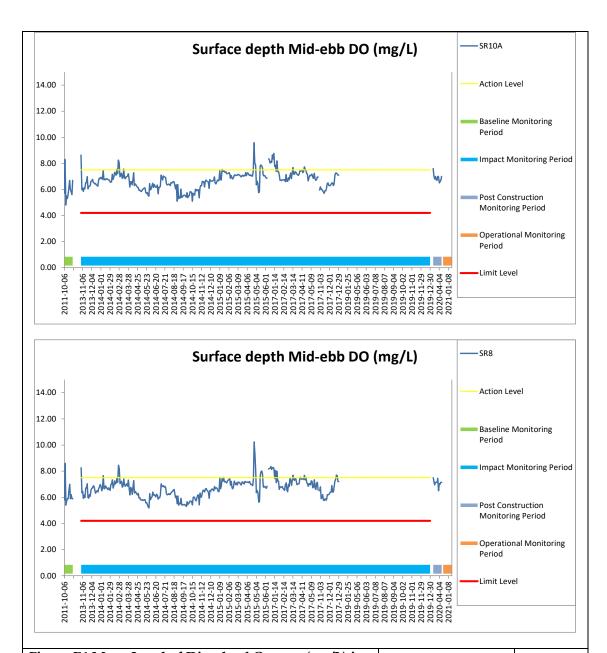


Figure E4 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-ebb tide during the course of the Contract at SR10A and SR8.



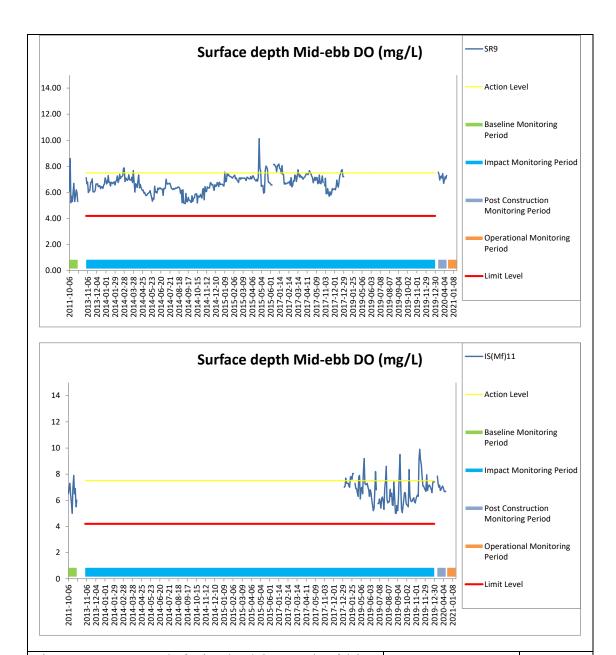


Figure E5 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-ebb tide during the course of the Contract at SR9 and IS(Mf)11.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



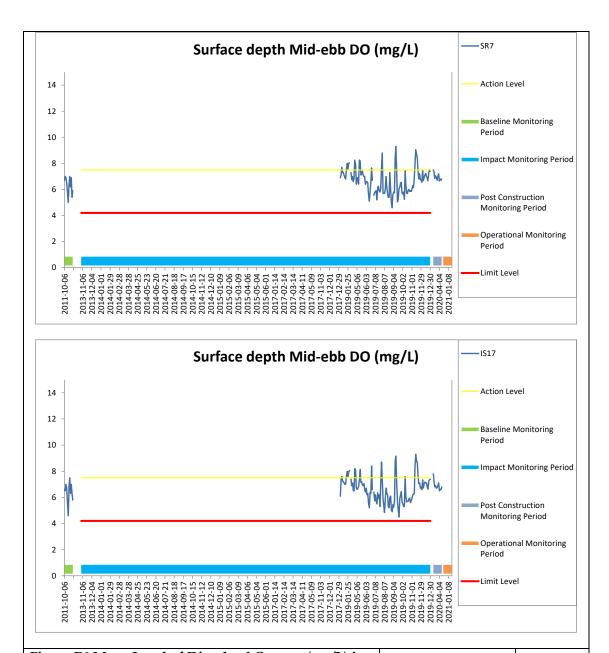


Figure E6 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-ebb tide during the course of the Contract at SR7 and IS17.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



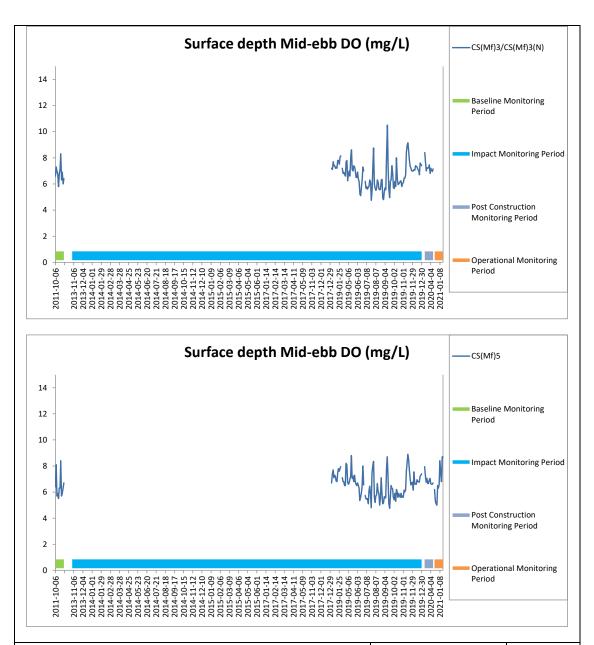


Figure E7 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-ebb tide during the course of the Contract at CS(Mf)3/CS(Mf)3(N) and CS(Mf)5.



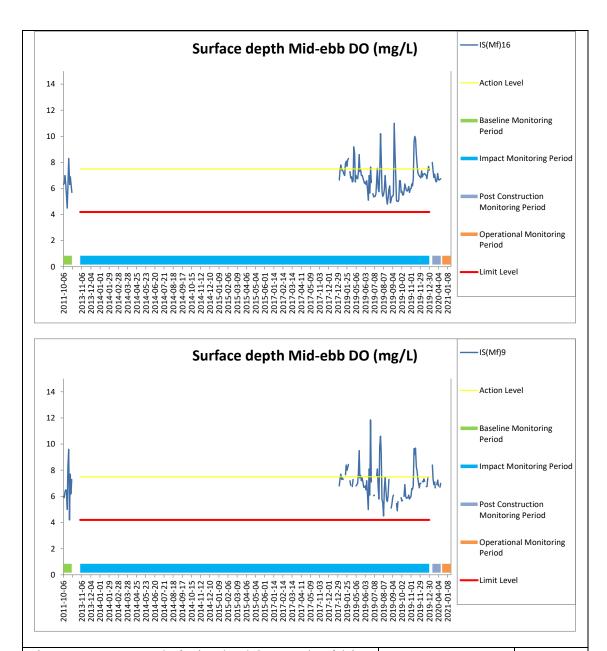
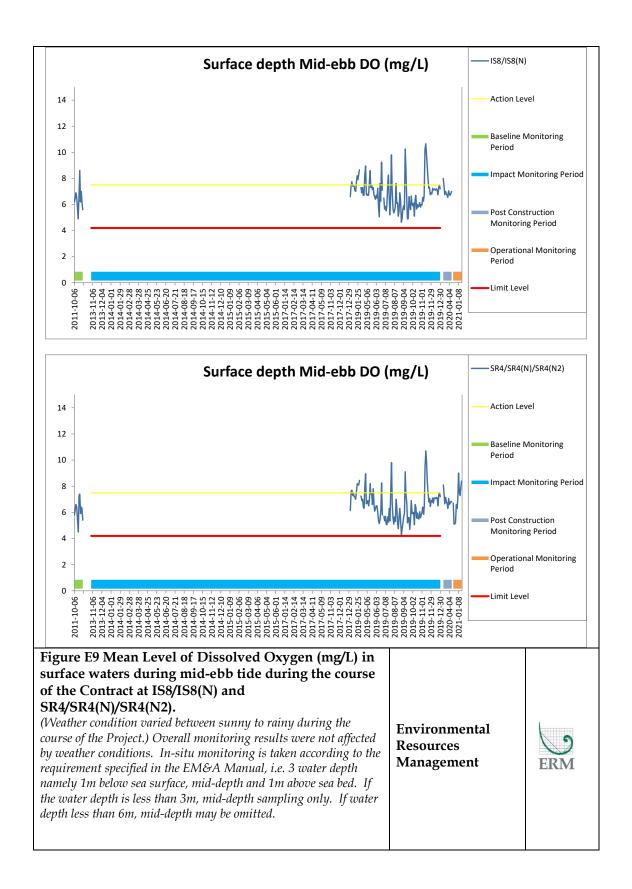
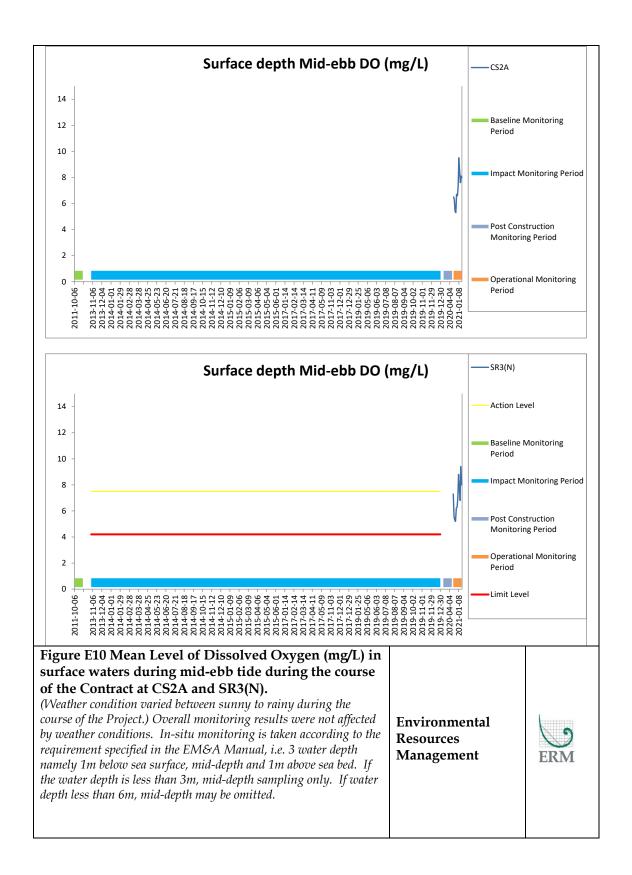


Figure E8 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-ebb tide during the course of the Contract at IS(Mf)16 and IS(Mf)9.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.







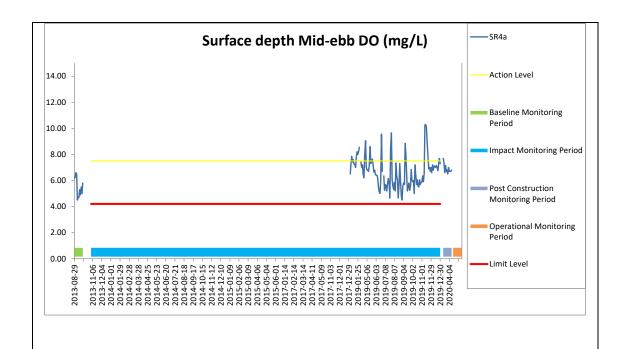


Figure E11 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-ebb tide during the course of the Contract at SR4a.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



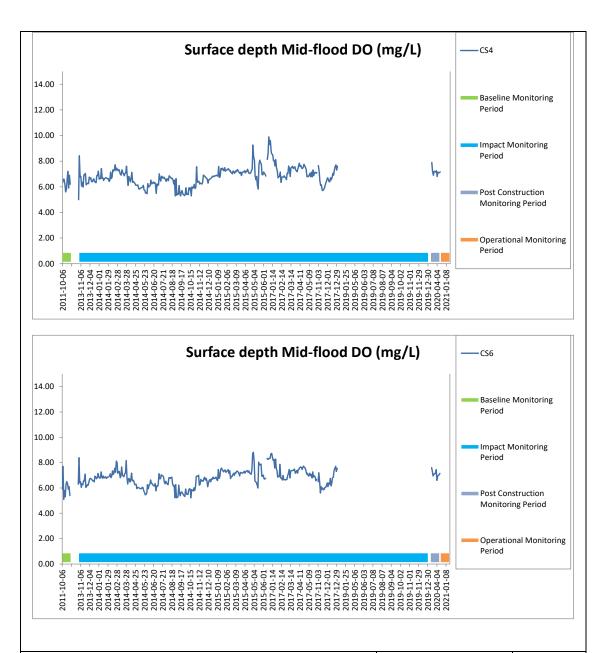


Figure E12 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-flood tide during the course of the Contract at CS4 and CS6.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



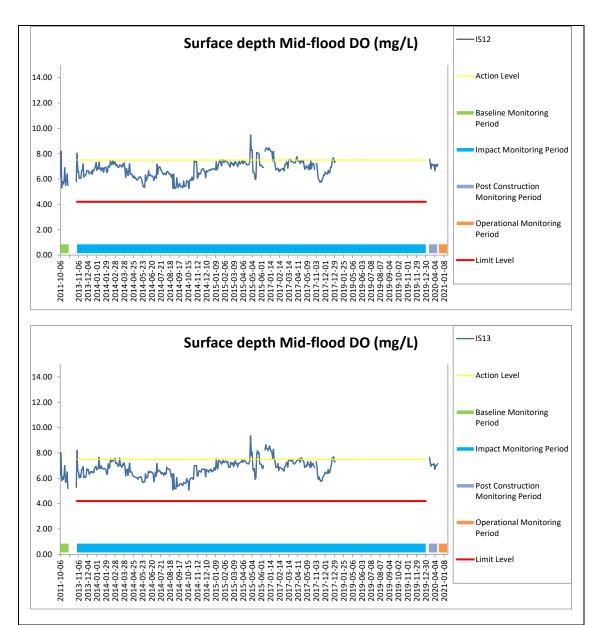
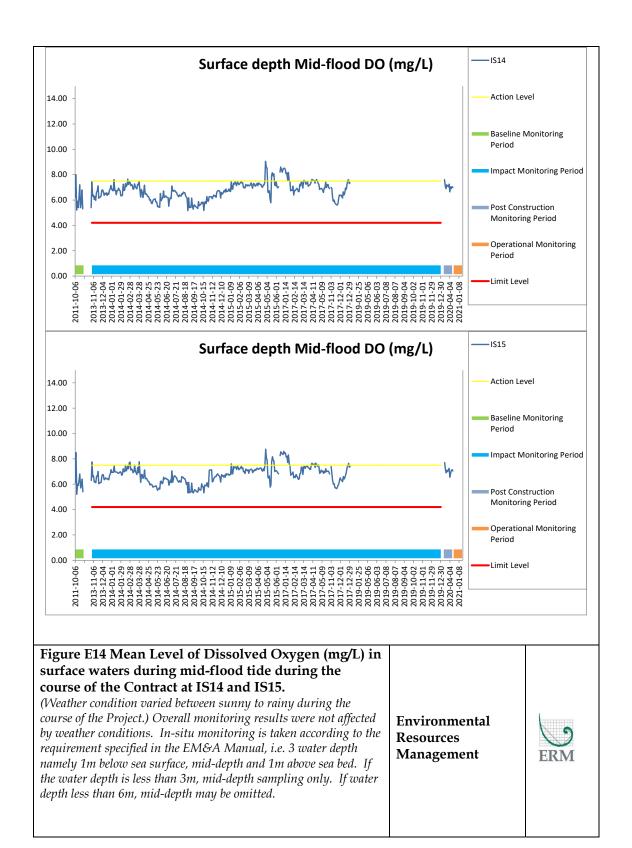


Figure E13 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-flood tide during the course of the Contract at IS12 and IS13.





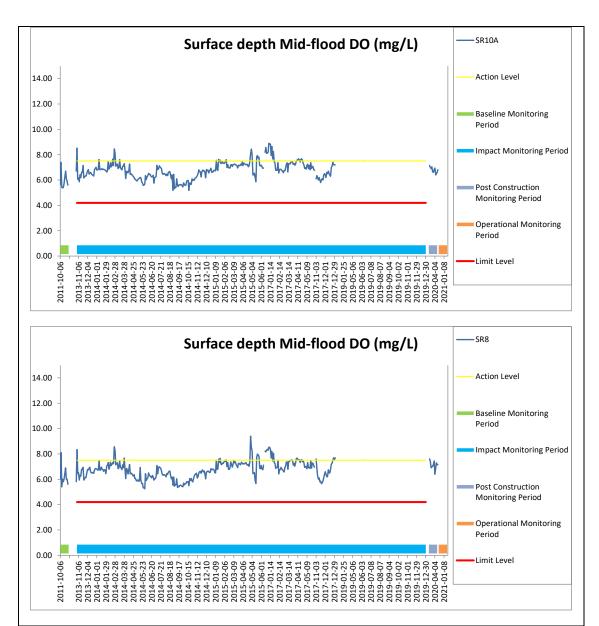


Figure E15 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-flood tide during the course of the Contract at SR10A and SR8.



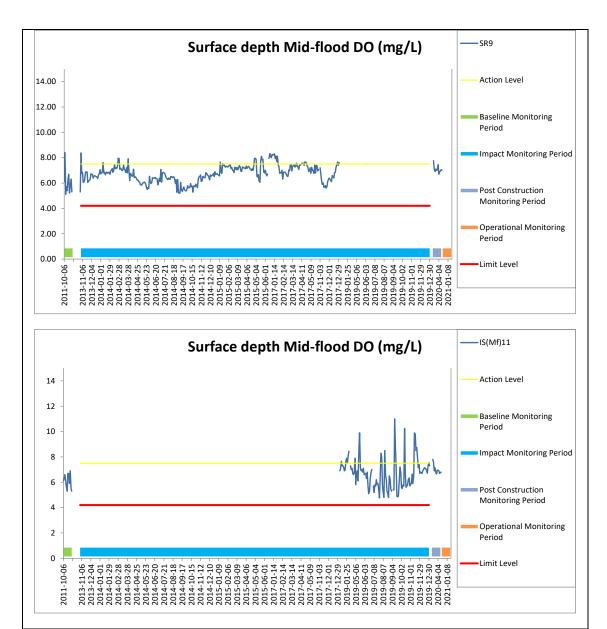


Figure E16 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-flood tide during the course of the Contract at SR9 and IS(Mf)11.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



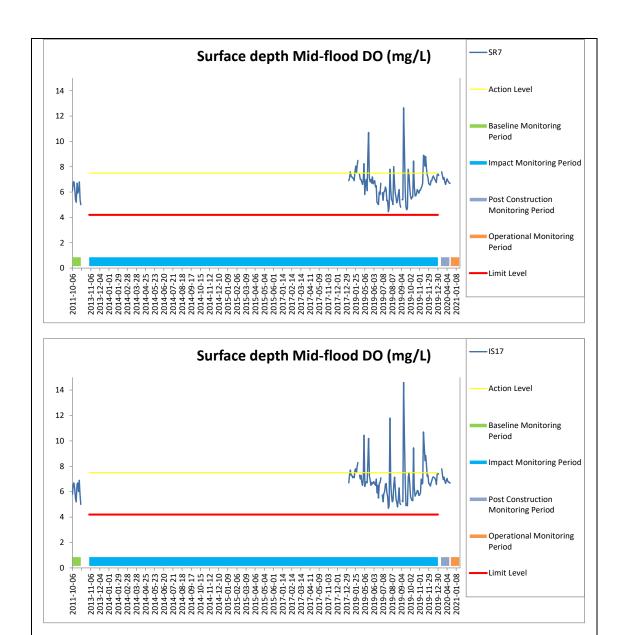


Figure E17 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-flood tide during the course of the Contract at SR7 and IS17.



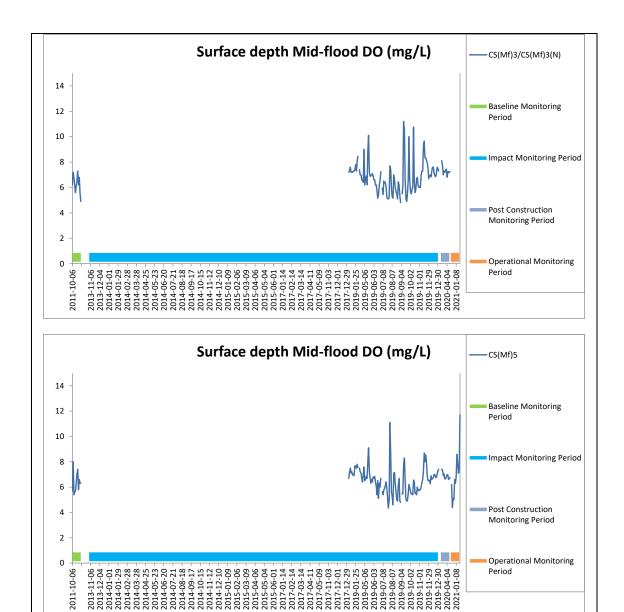


Figure E18 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-flood tide during the course of the Contract at CS(Mf)3/CS(Mf)3(N) and CS(Mf)5.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



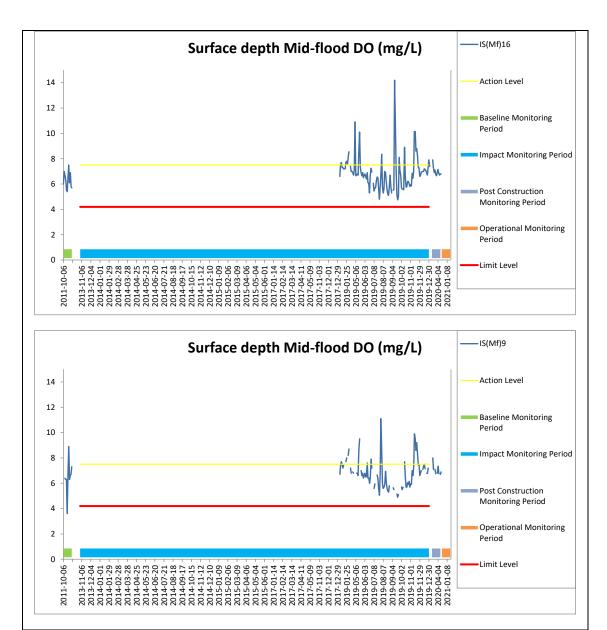
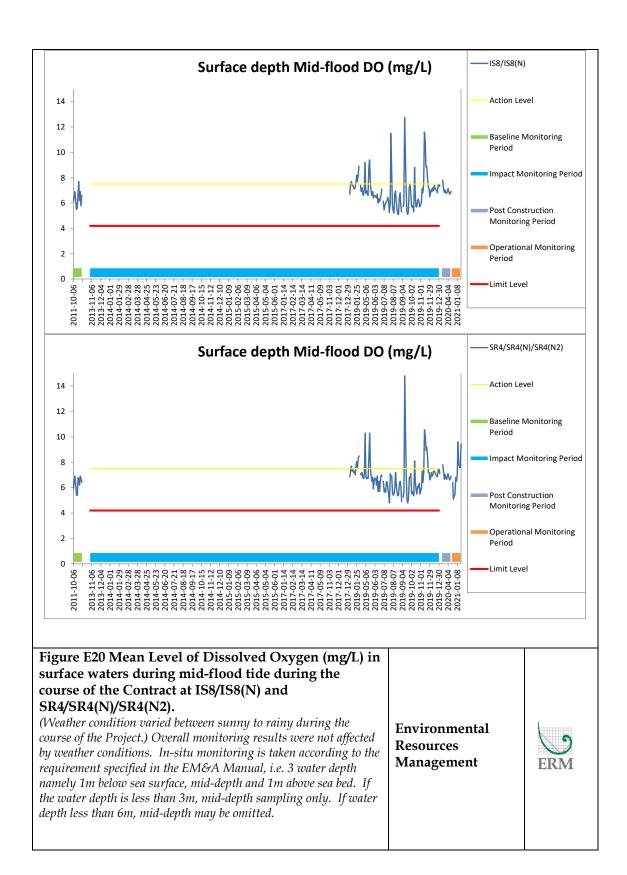


Figure E19 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-flood tide during the course of the Contract at IS(Mf)16 and IS(Mf)9.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.





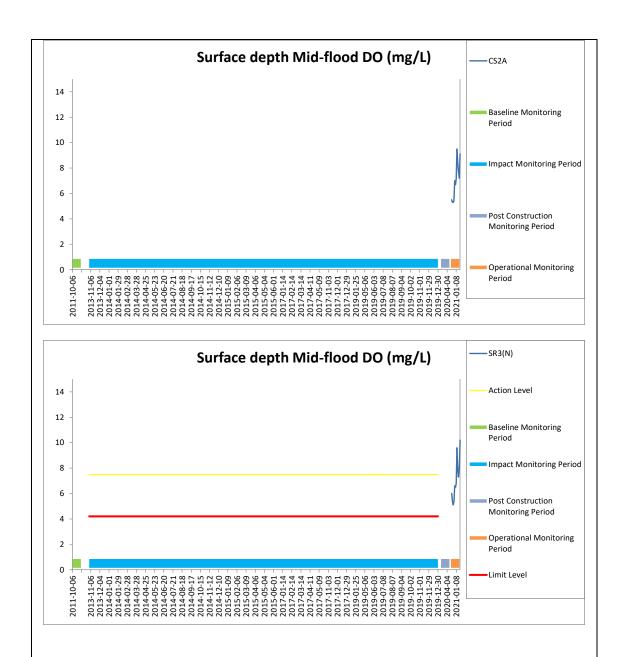


Figure E21 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-flood tide during the course of the Contract at CS2A and SR3(N).

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



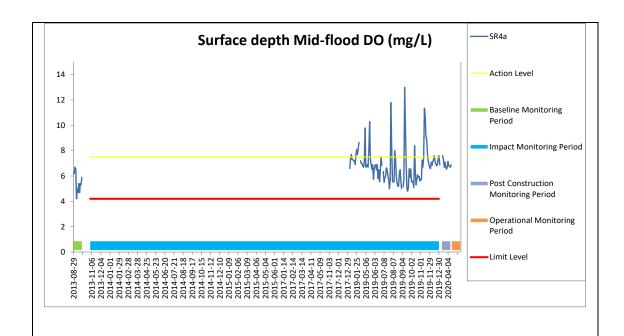


Figure E22 Mean Level of Dissolved Oxygen (mg/L) in surface waters during mid-flood tide during the course of the Contract at SR4a.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



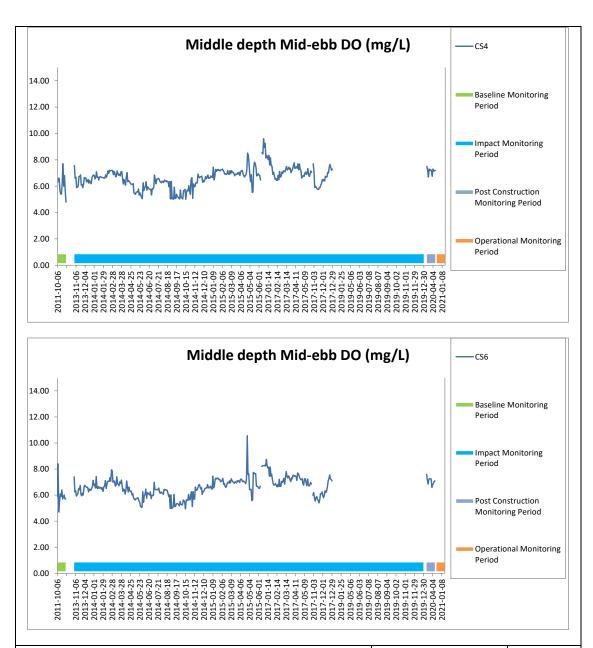


Figure E23 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-ebb tide during the course of the Contract at CS4 and CS6.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



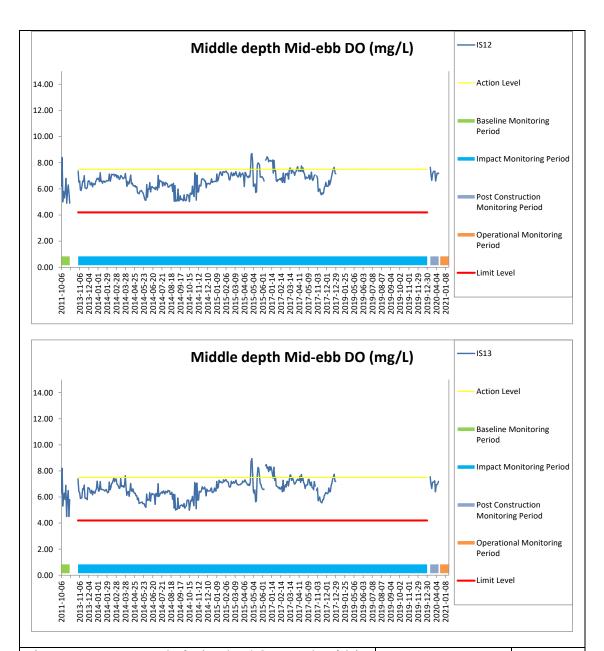


Figure E24 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-ebb tide during the course of the Contract at IS12 and IS13.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



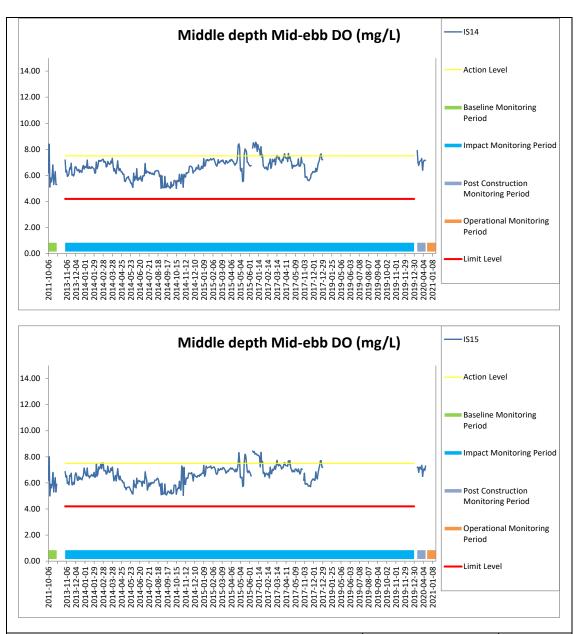


Figure E25 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-ebb tide during the course of the Contract at IS14 and IS15.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



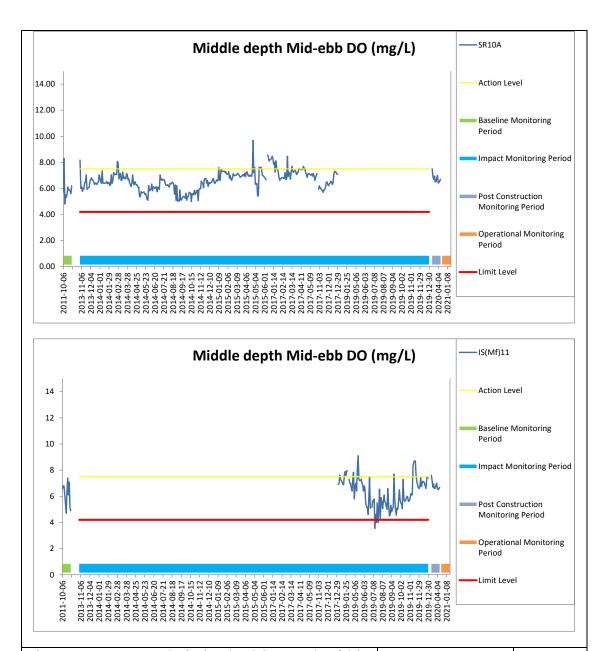


Figure E26 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-ebb tide during the course of the Contract at SR10A and IS(Mf)11.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



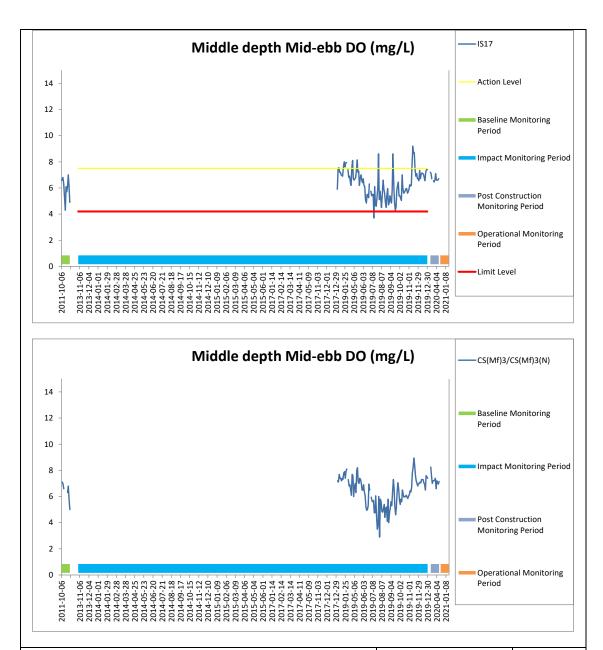


Figure E27 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-ebb tide during the course of the Contract at IS17 and CS(Mf)3/CS(Mf)3(N).



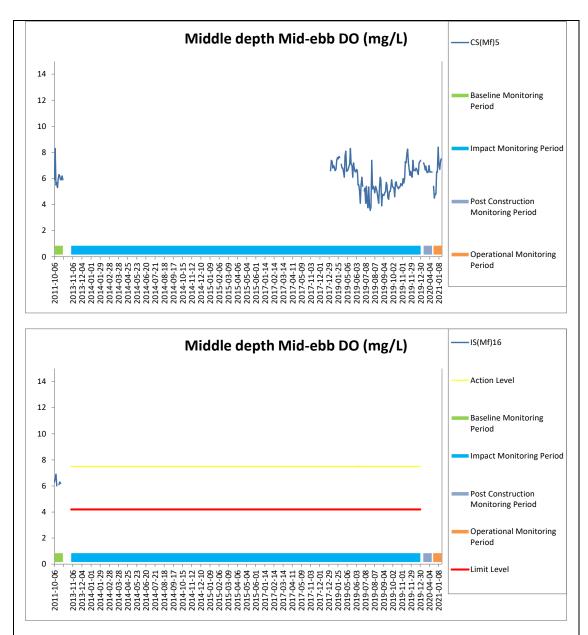


Figure E28 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-ebb tide during the course of the Contract at CS(Mf)5 and IS(Mf)16.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



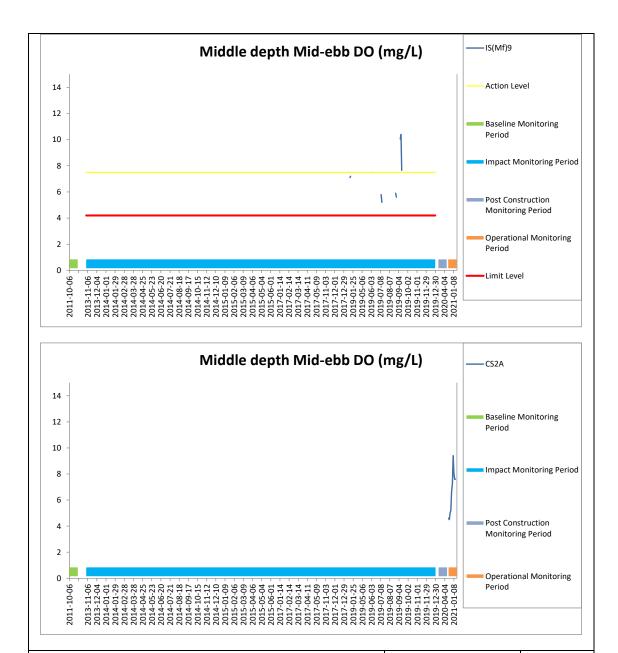


Figure E29 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-ebb tide during the course of the Contract at IS(Mf)9 and CS2A.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



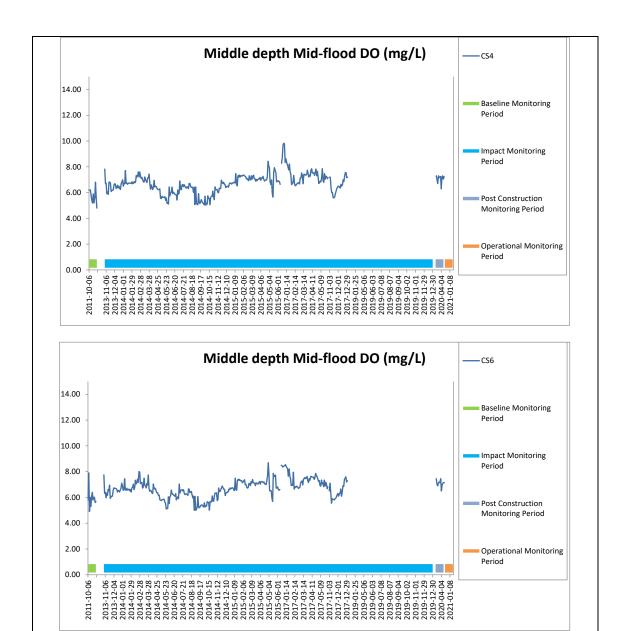


Figure E30 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-flood tide during the course of the Contract at CS4 and CS6.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



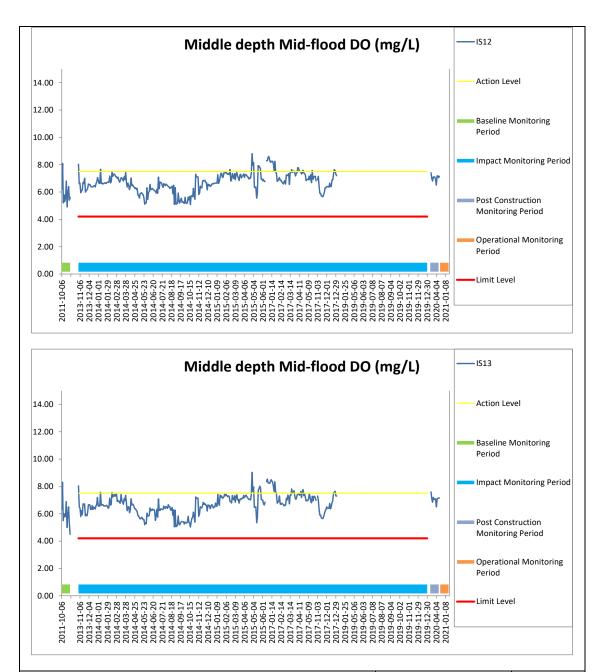


Figure E31 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-flood tide during the course of the Contract at IS12 and IS13.



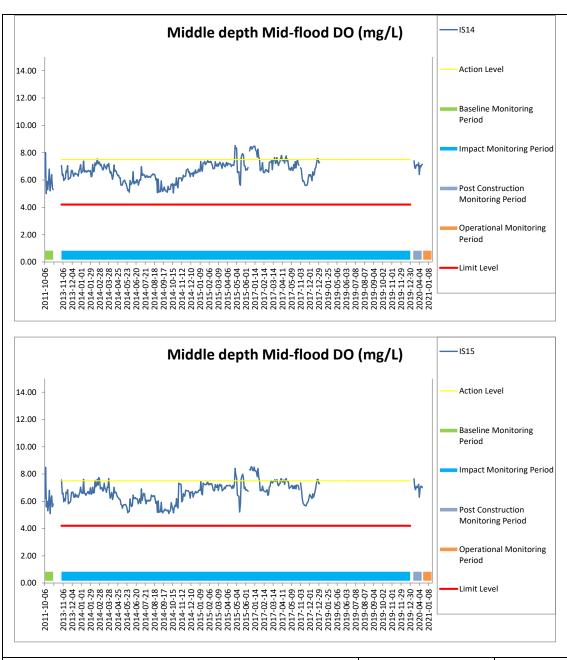


Figure E32 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-flood tide during the course of the Contract at IS14 and IS15.



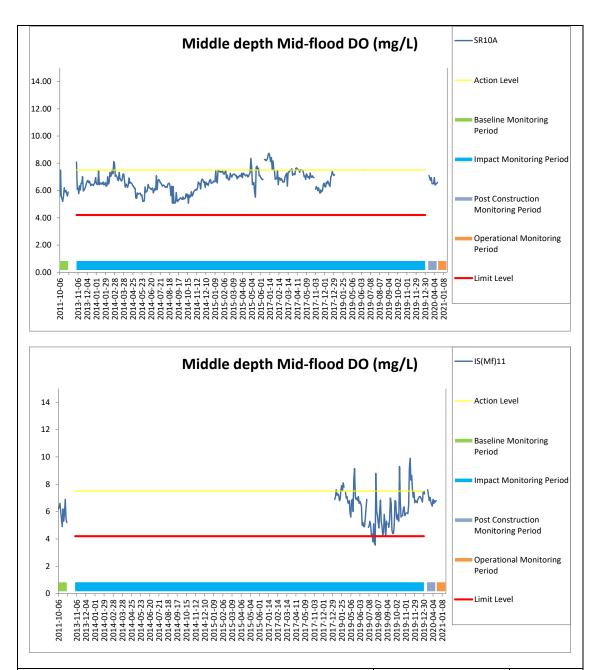


Figure E33 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-flood tide during the course of the Contract at SR10A and IS(Mf)11.



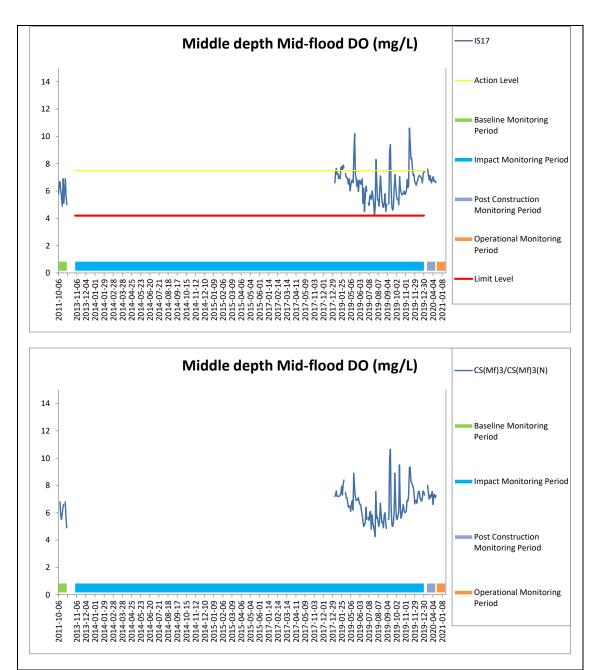


Figure E34 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-flood tide during the course of the Contract at IS17 and CS(Mf)3/CS(Mf)3(N).



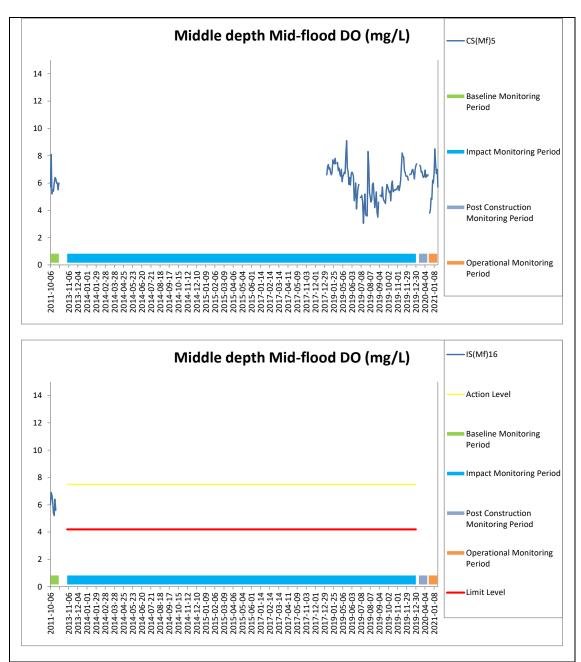


Figure E35 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-flood tide during the course of the Contract at CS(Mf)5 and IS(Mf)16.



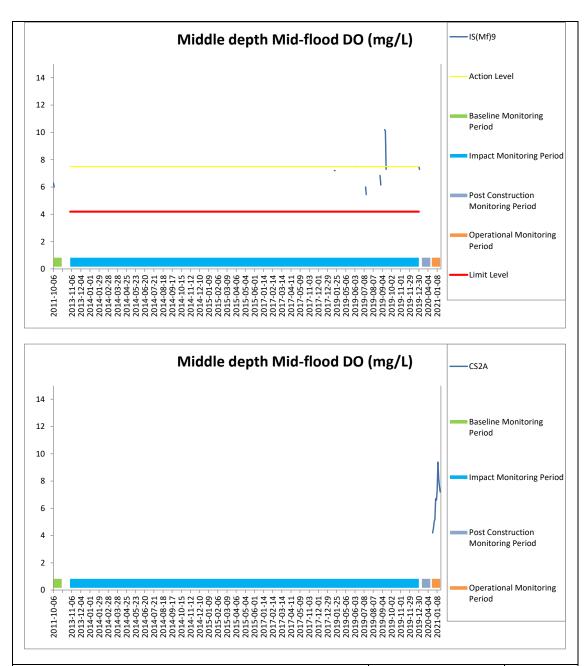


Figure E36 Mean Level of Dissolved Oxygen (mg/L) in mid-depth waters during mid-flood tide during the course of the Contract at IS(Mf)9 and CS2A.



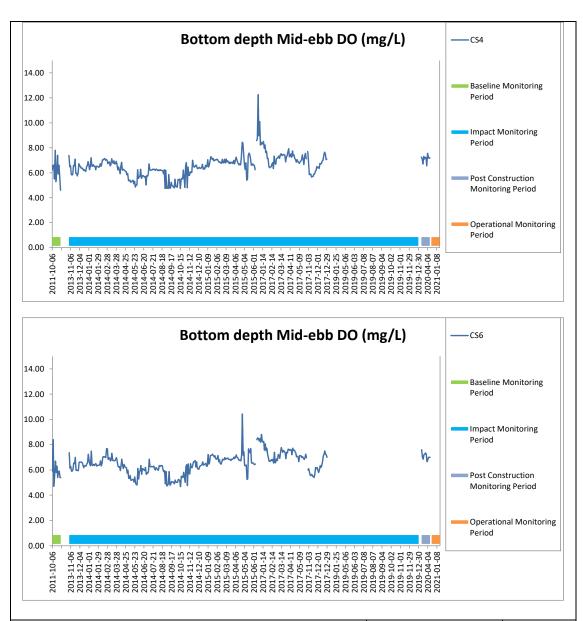


Figure E37 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at CS4 and CS6.



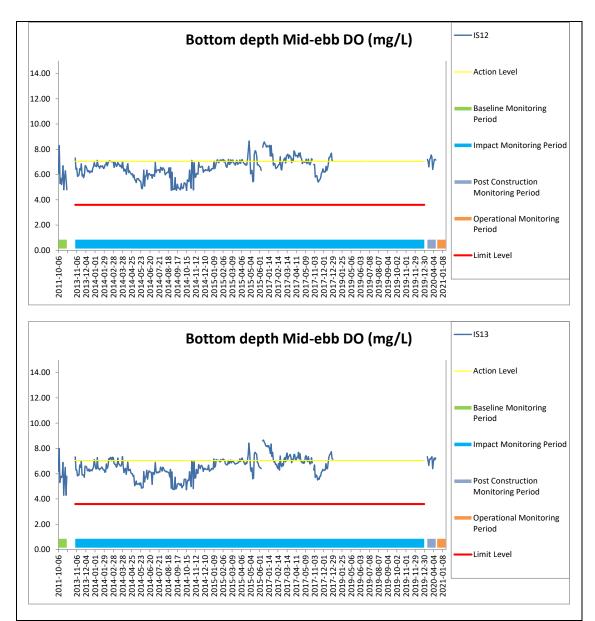


Figure E38 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at IS12 and IS13.



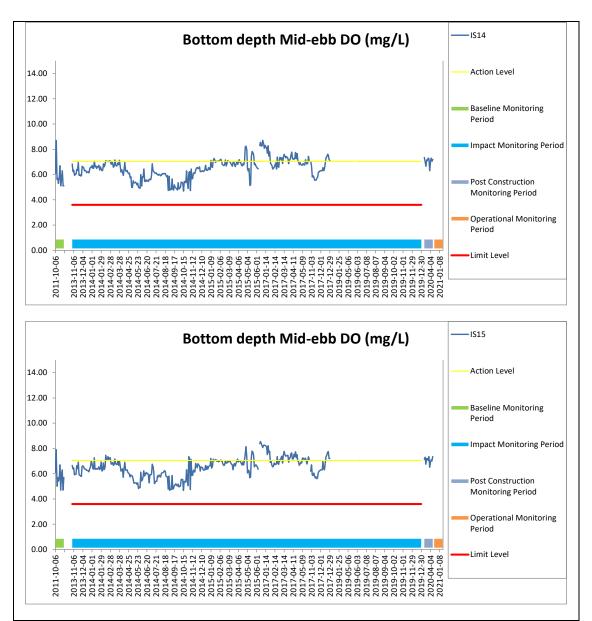


Figure E39 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at IS14 and IS15.



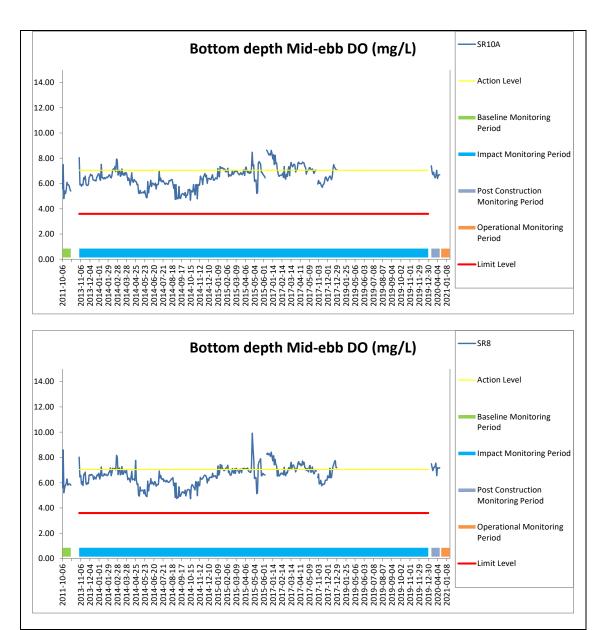


Figure E40 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at SR10A and SR8.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



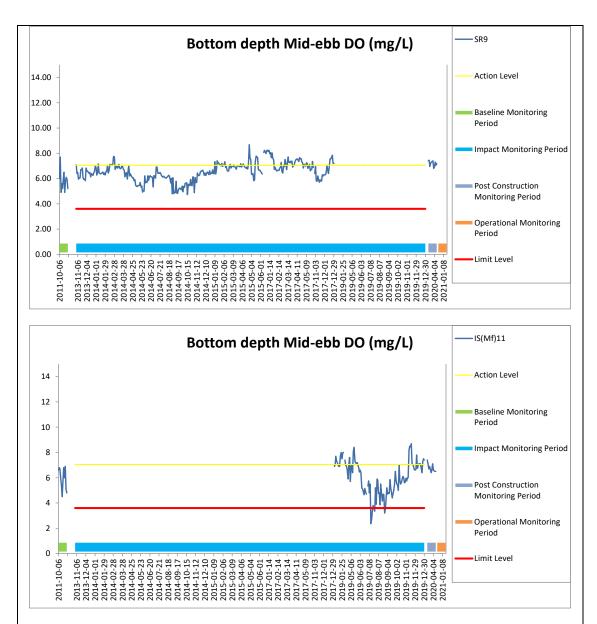
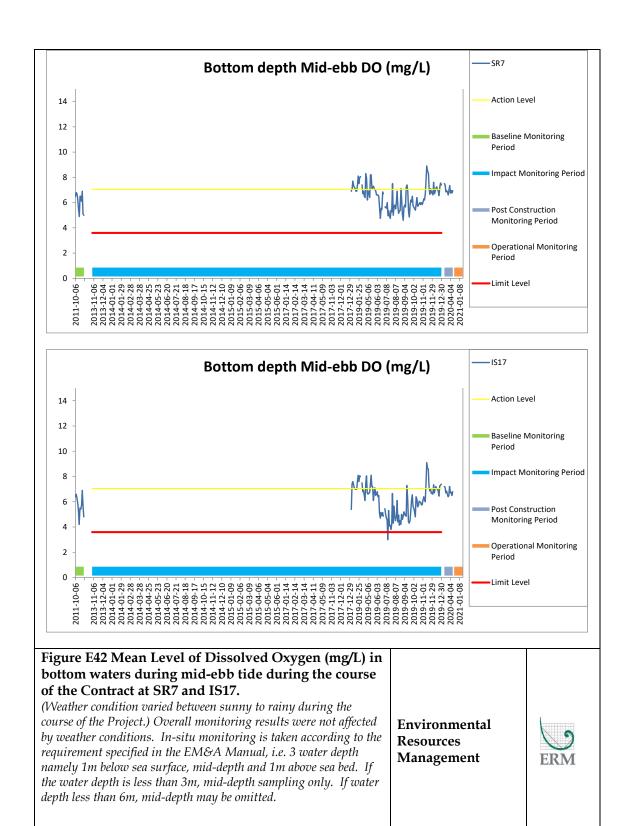


Figure E41 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at SR9 and IS(Mf)11.





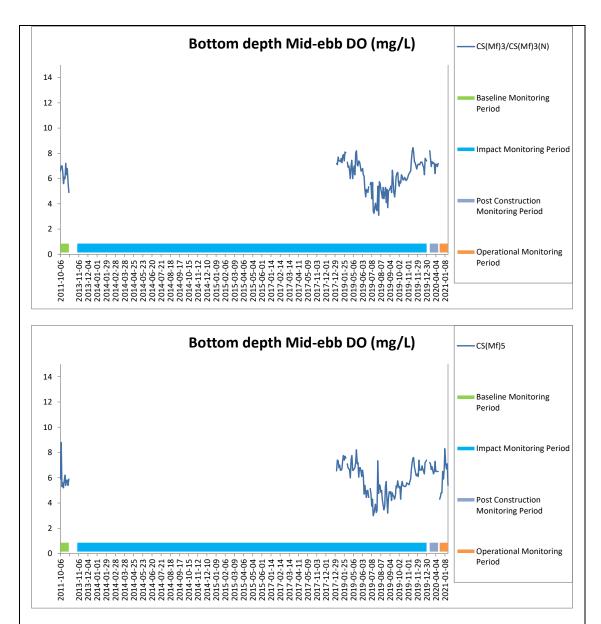


Figure E43 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at CS(Mf)3/CS(Mf)3(N) and CS(Mf)5.



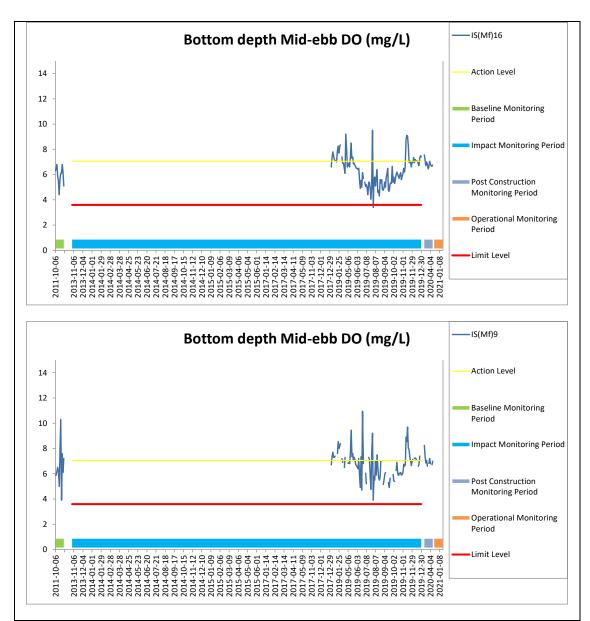


Figure E44 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at IS(Mf)16 and IS(Mf)9.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



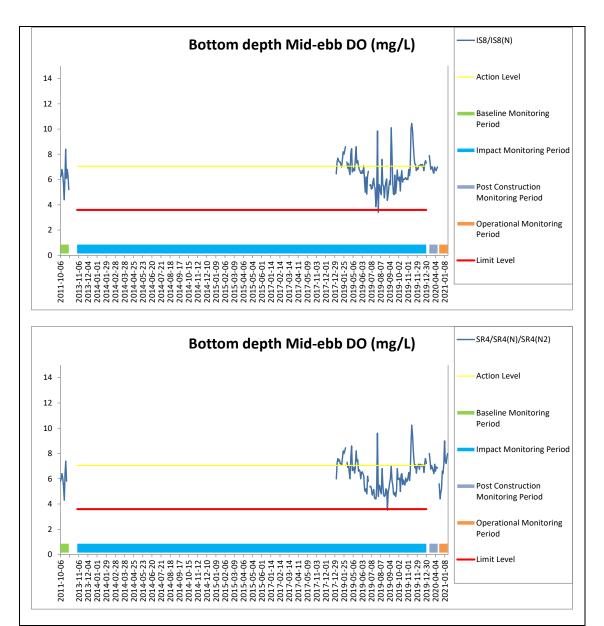


Figure E45 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at IS8/IS8(N) and SR4/SR4(N)/SR4(N2).



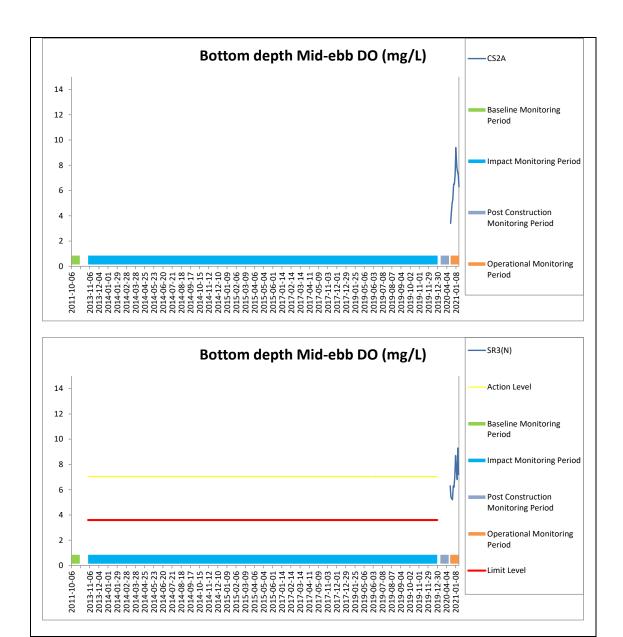


Figure E46 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at CS2A and SR3(N).

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



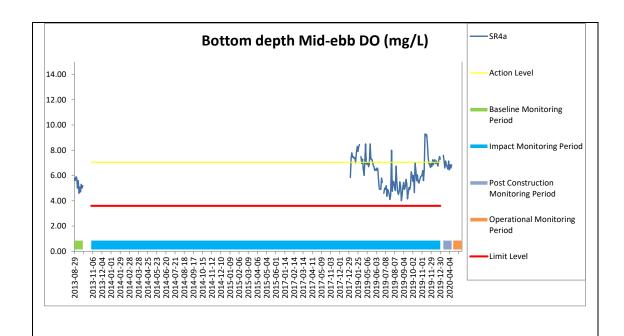


Figure E47 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-ebb tide during the course of the Contract at SR4a.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.





Figure E48 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at CS4 and CS6.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



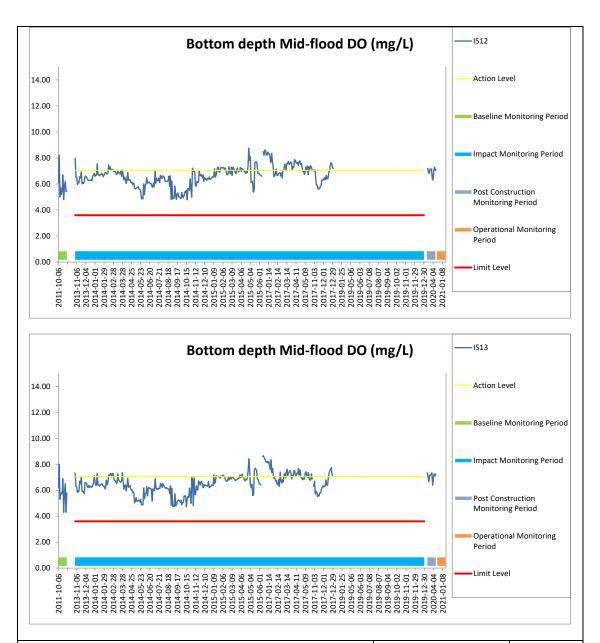


Figure E49 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at IS12 and IS13.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



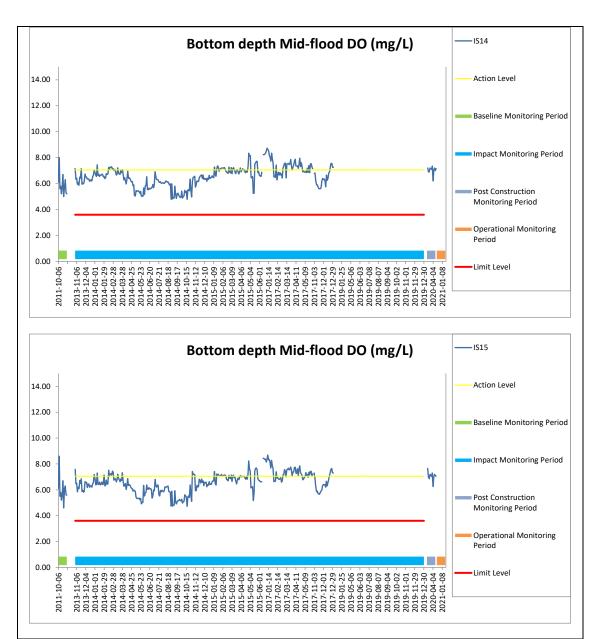


Figure E50 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at IS14 and IS15.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



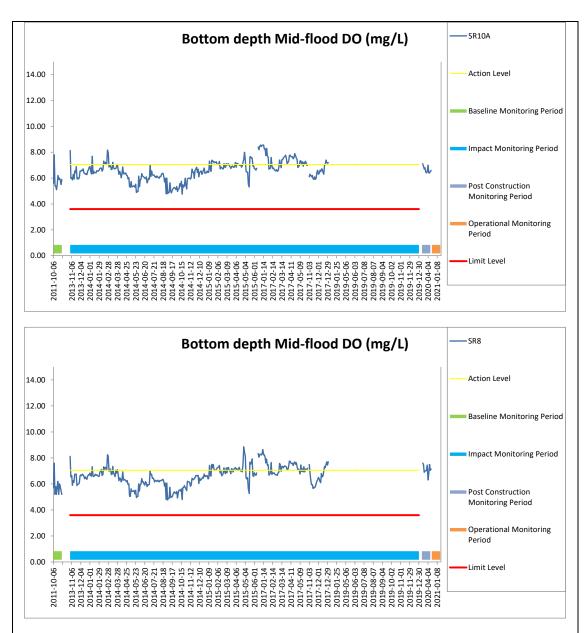


Figure E51 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at SR10A and SR8.



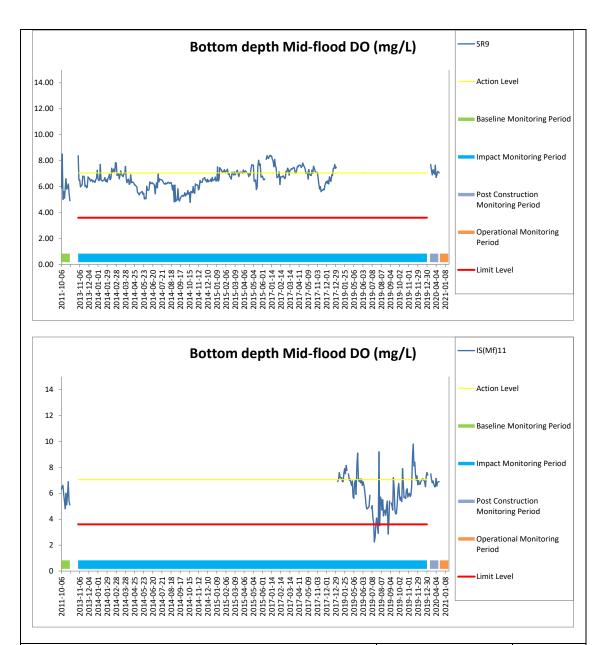


Figure E52 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at SR9 and IS(Mf)11.



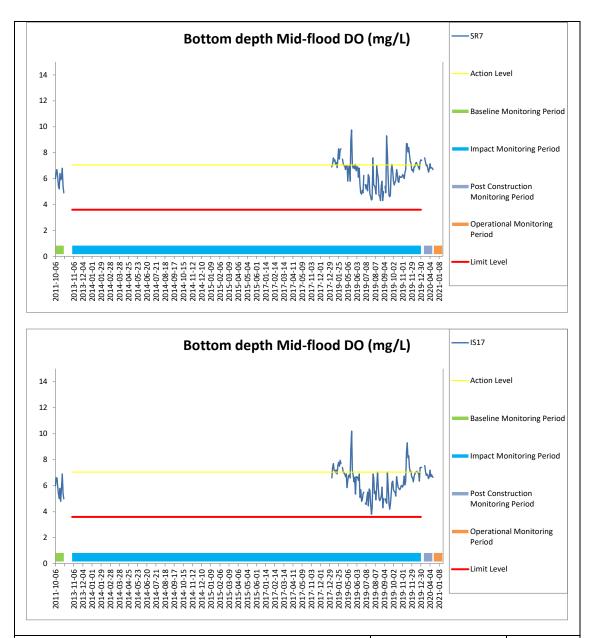


Figure E53 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at SR7 and IS17.



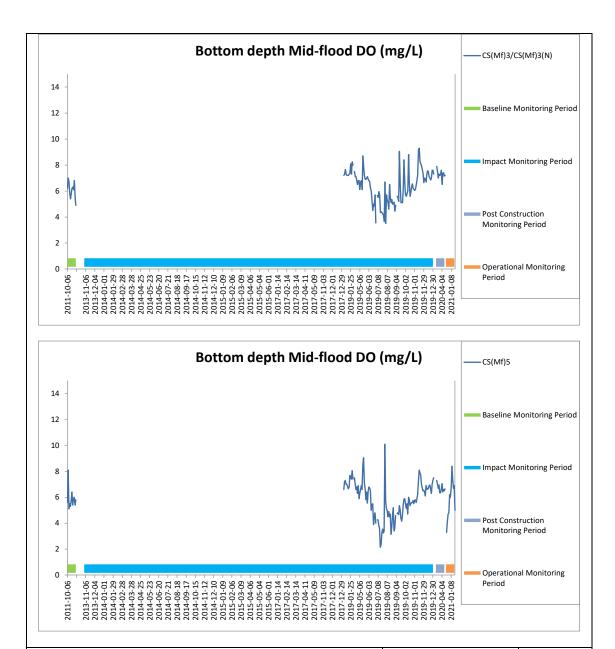


Figure E54 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at CS(Mf)3/CS(Mf)3(N) and CS(Mf)5.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



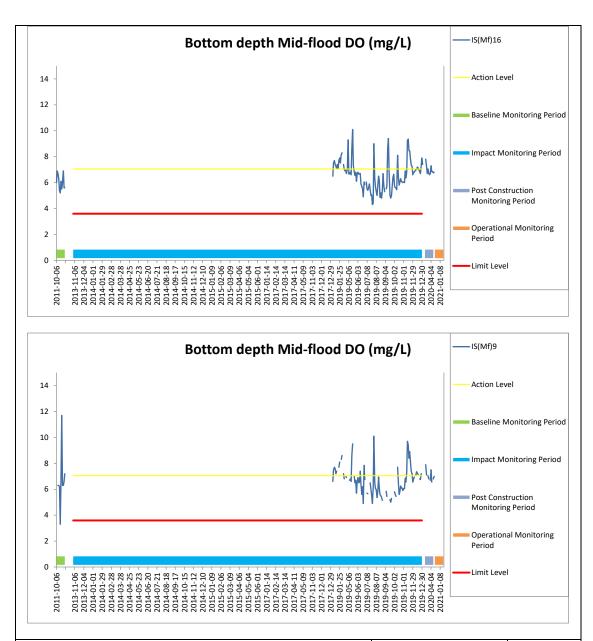


Figure E55 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at IS(Mf)16 and IS(Mf)9.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



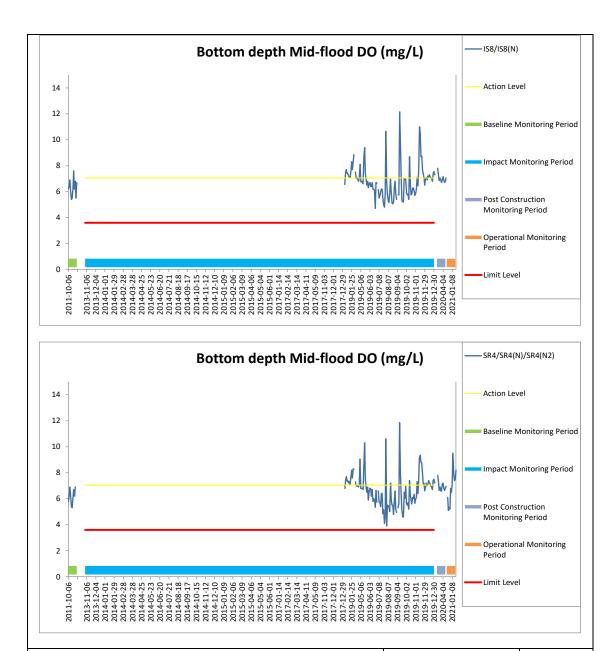


Figure E56 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at IS8/IS8(N) and SR4/SR4(N)/SR4(N2).

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



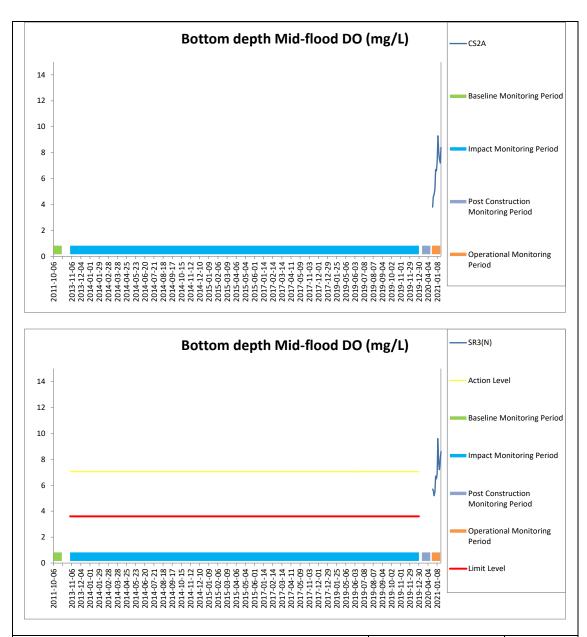


Figure E57 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at CS2A and SR3(N).



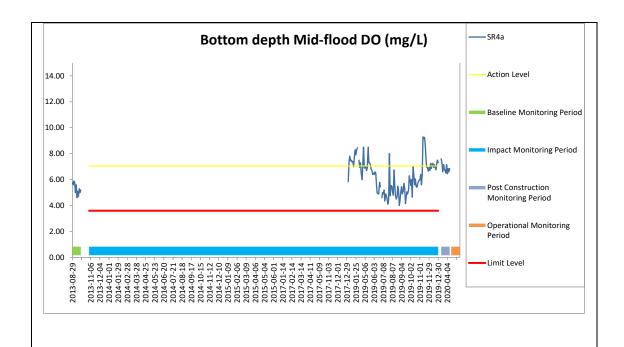


Figure E58 Mean Level of Dissolved Oxygen (mg/L) in bottom waters during mid-flood tide during the course of the Contract at SR4a.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.




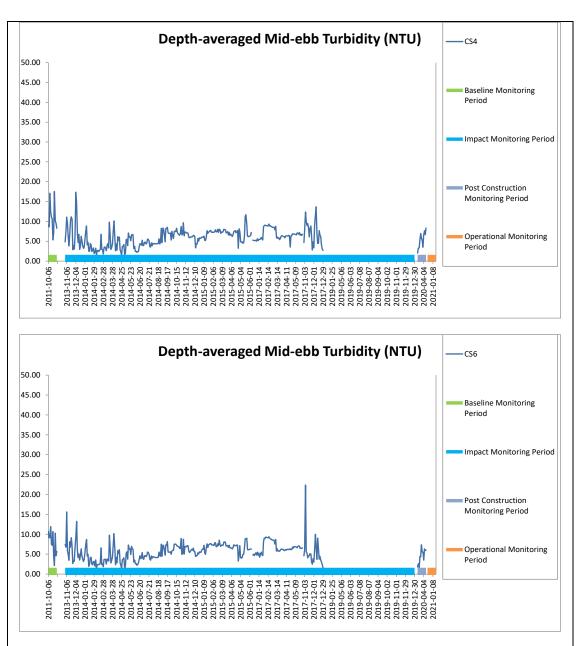


Figure E59 Mean Level of depth-averaged Turbidity (NTU) during mid-ebb tide during the course of the Contract at CS4 and CS6.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.




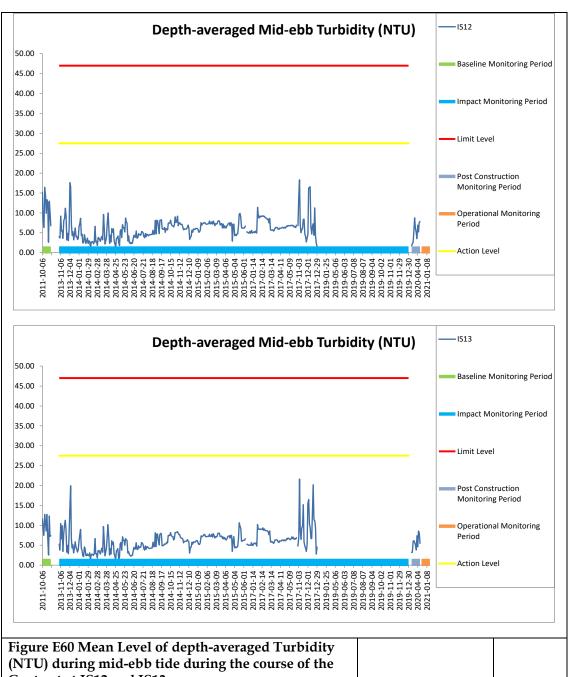



Contract at IS12 and IS13.


(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



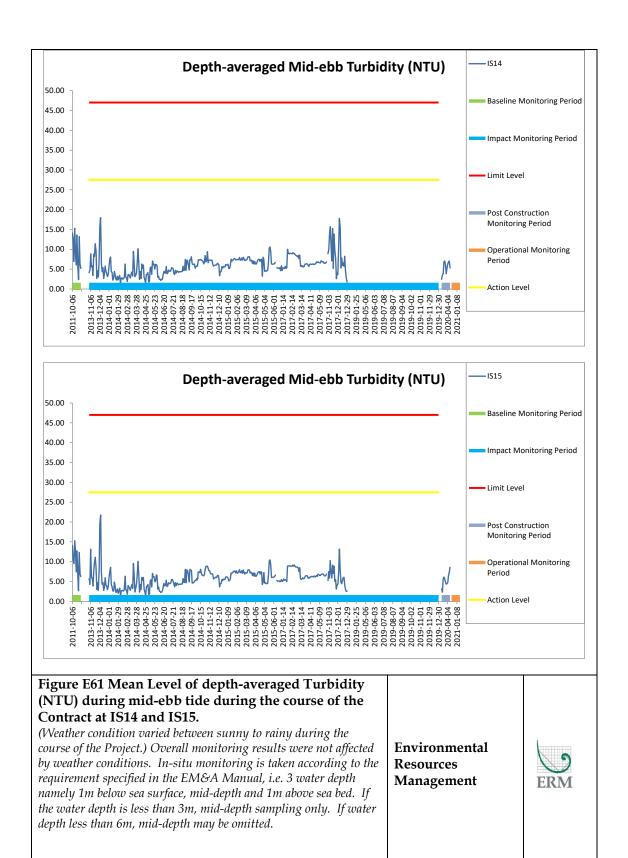

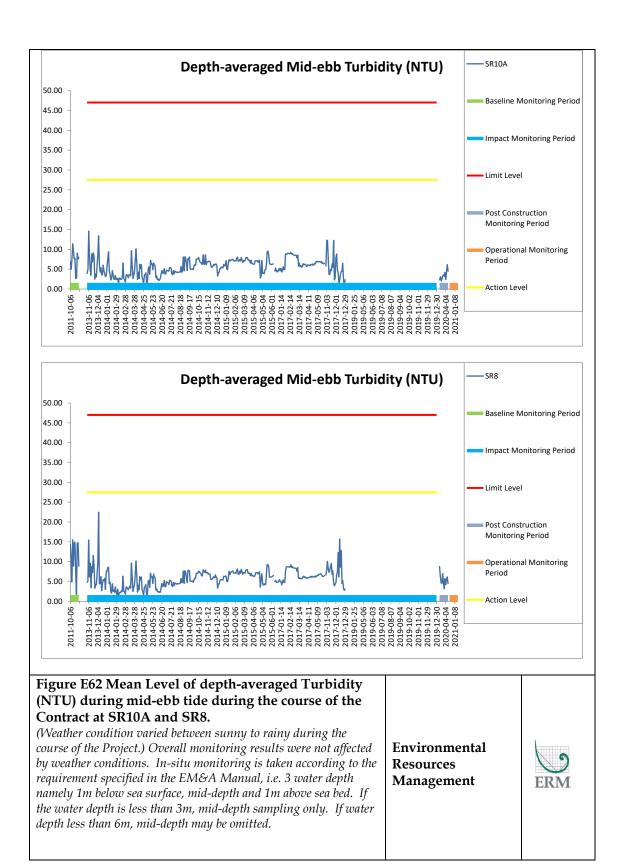

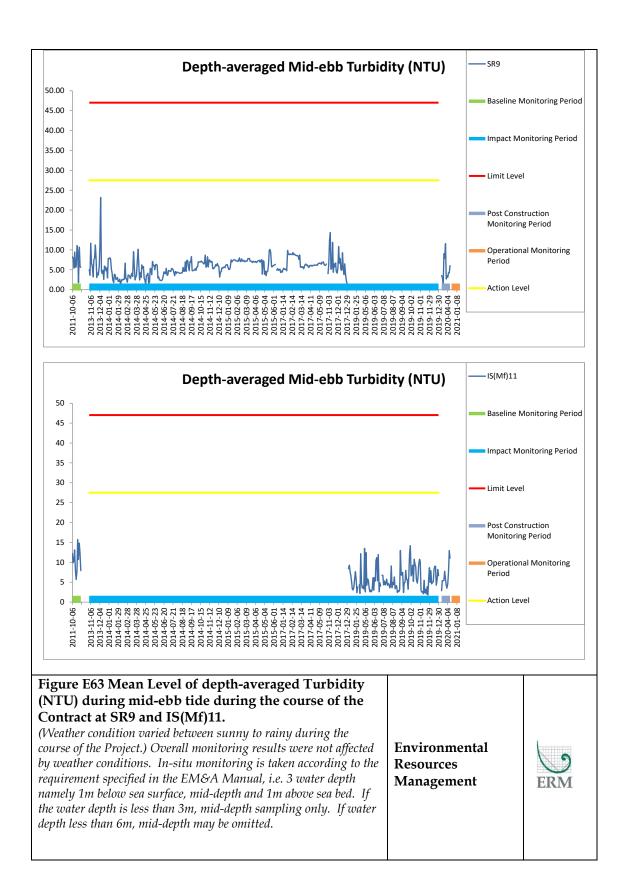

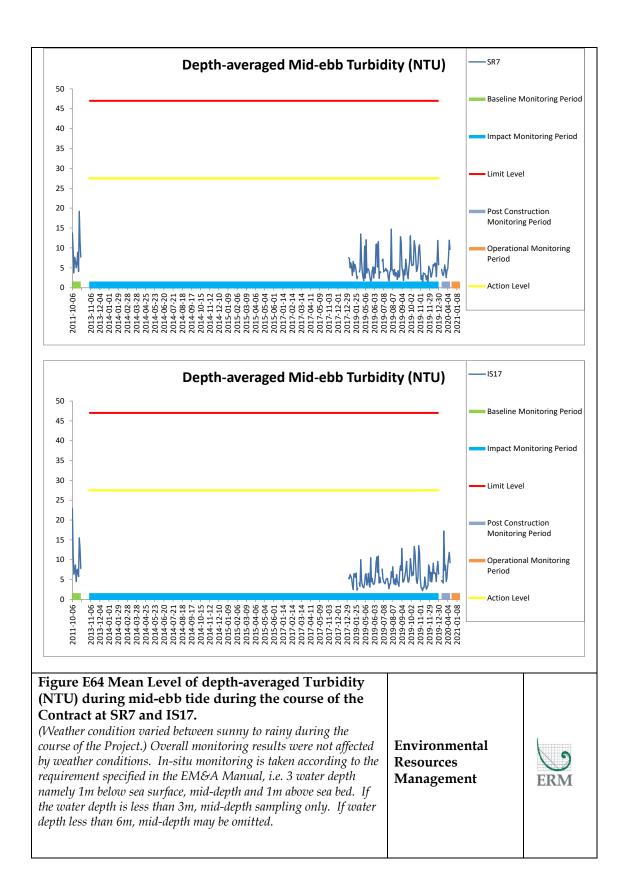



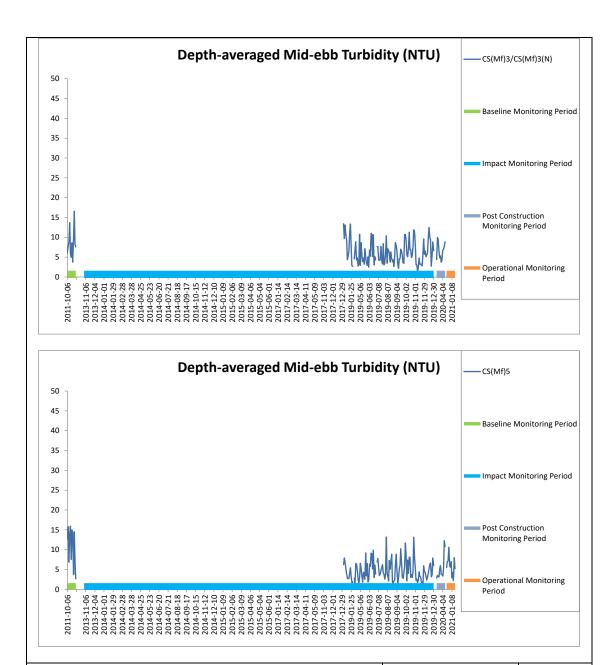


Figure E65 Mean Level of depth-averaged Turbidity (NTU) during mid-ebb tide during the course of the Contract at CS(Mf)3/CS(Mf)3(N) and CS(Mf)5.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



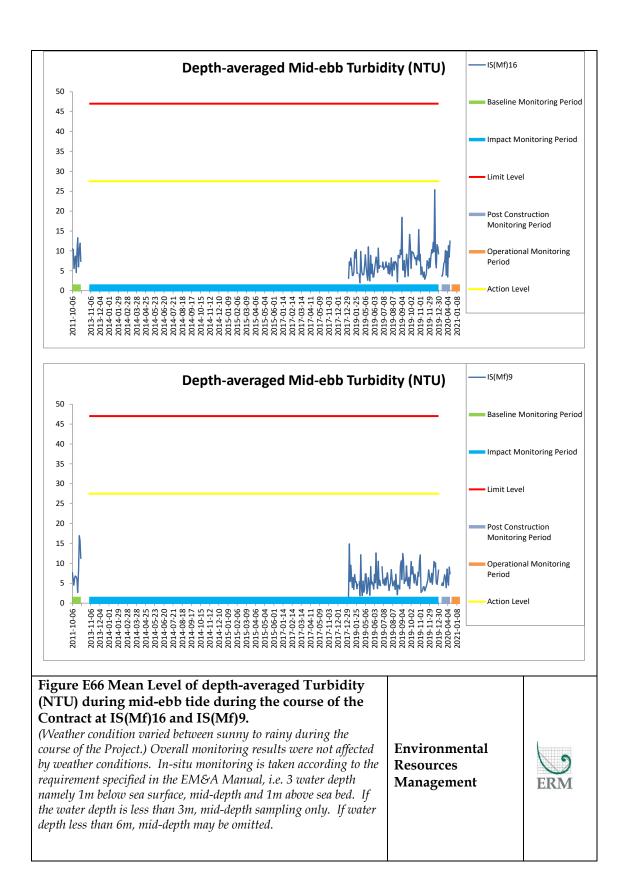


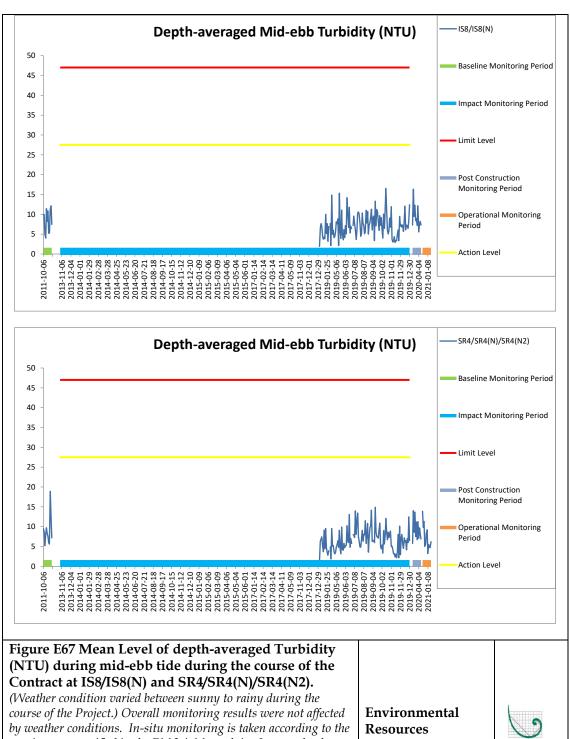

requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.

Management



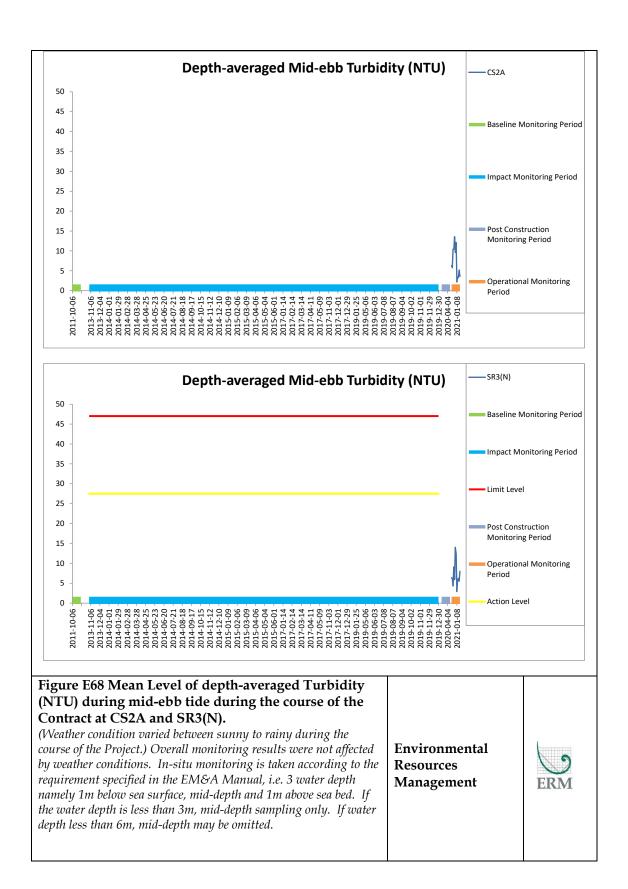

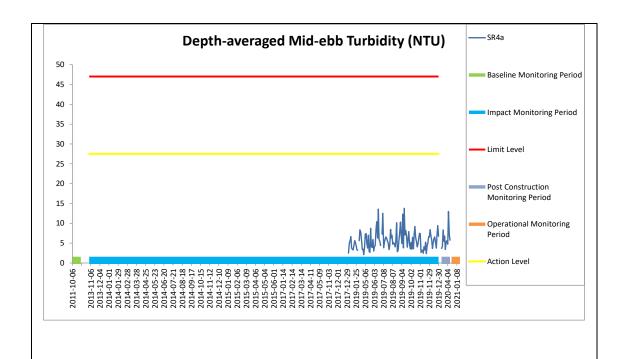


Figure E69 Mean Level of depth-averaged Turbidity (NTU) during mid-ebb tide during the course of the Contract at SR4a.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



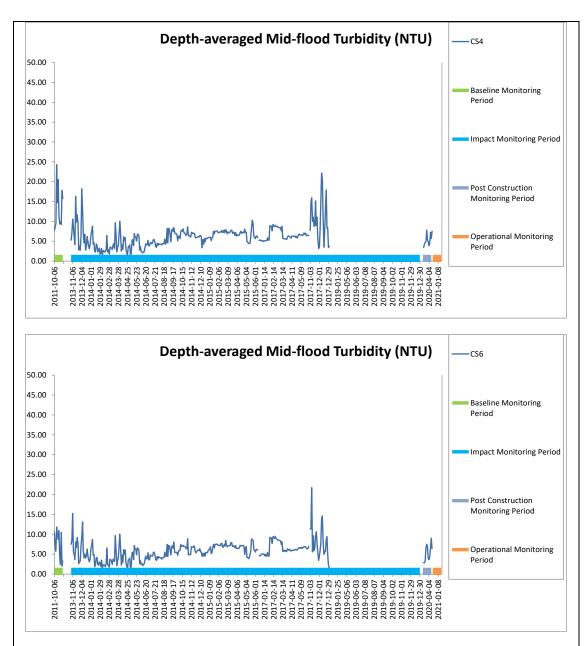
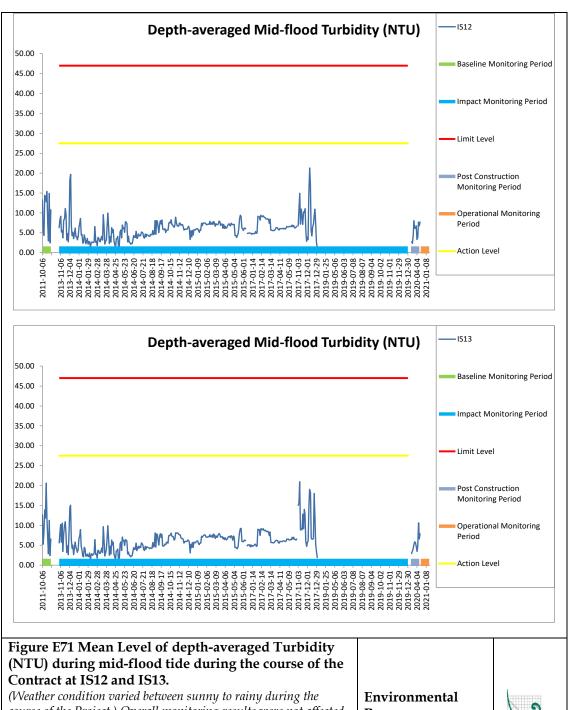
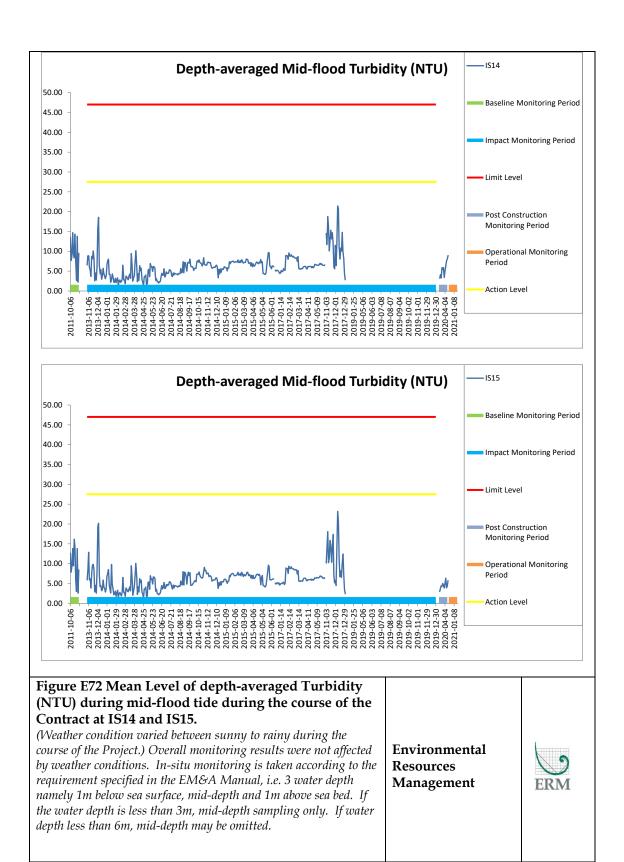



Figure E70 Mean Level of depth-averaged Turbidity (NTU) during mid-flood tide during the course of the Contract at CS4 and CS6.











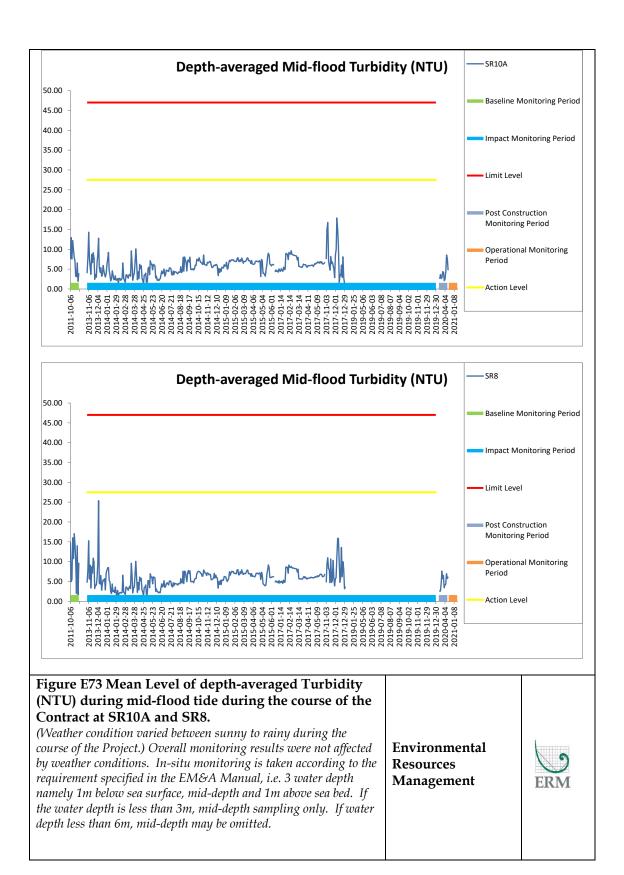

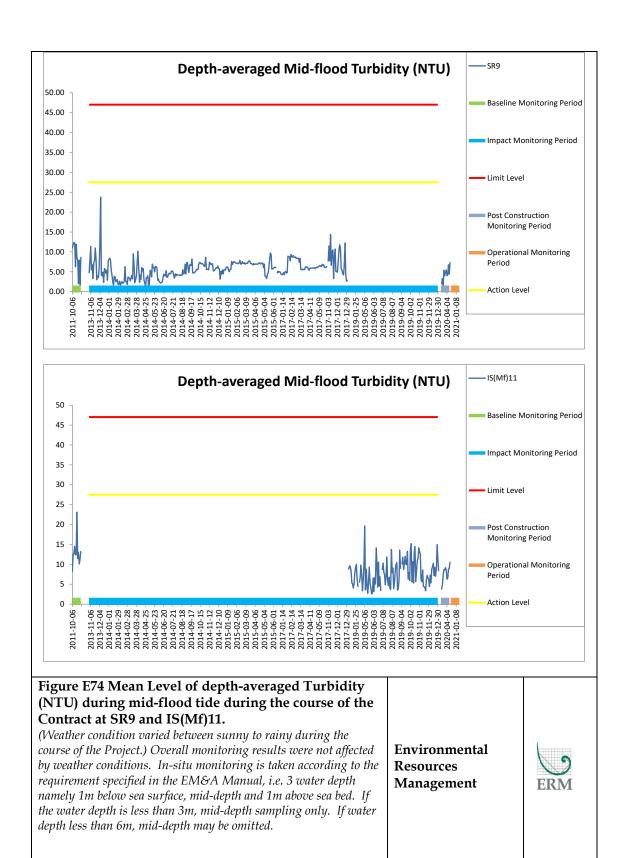

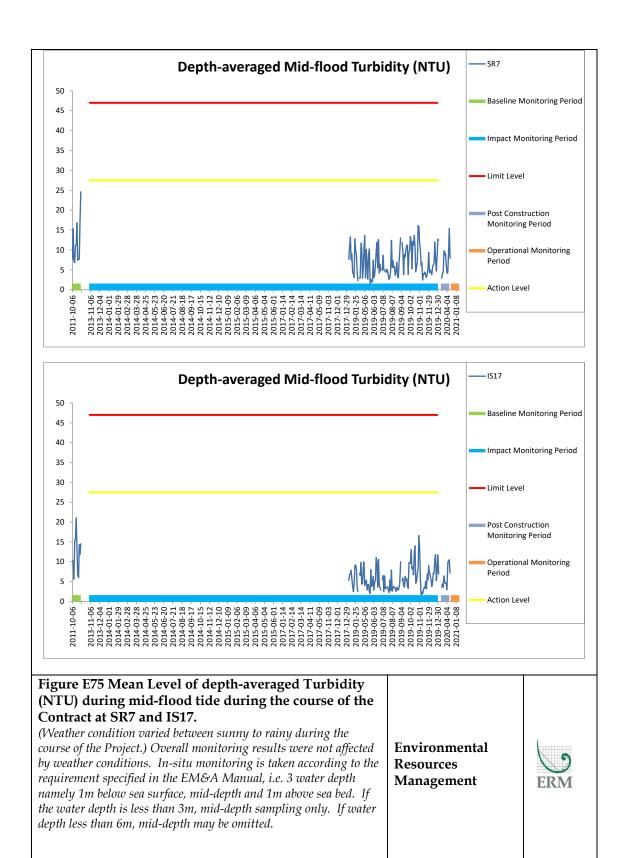

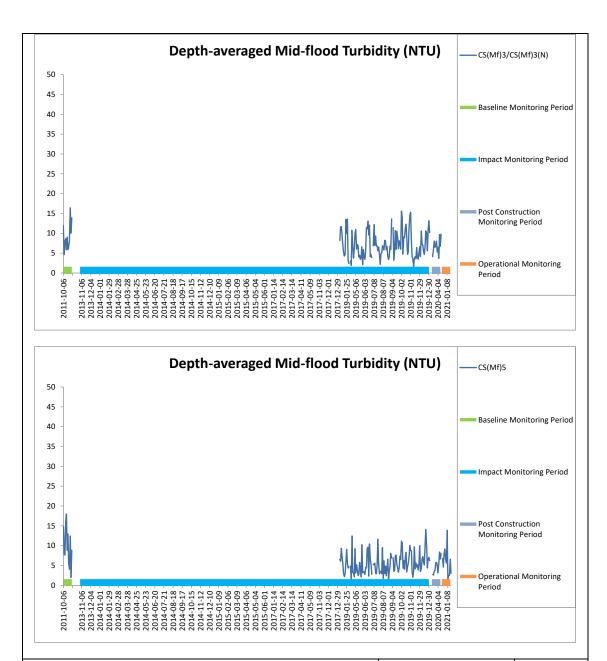
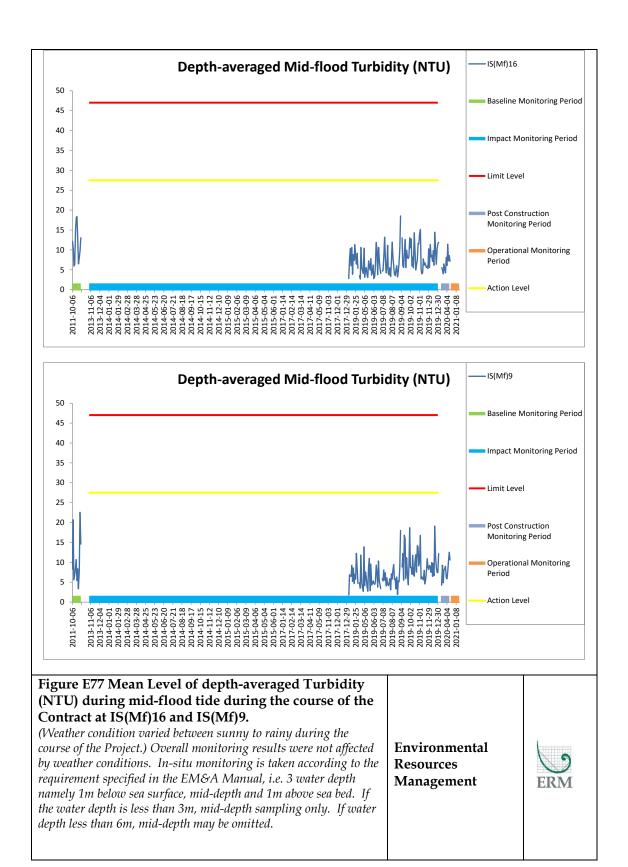
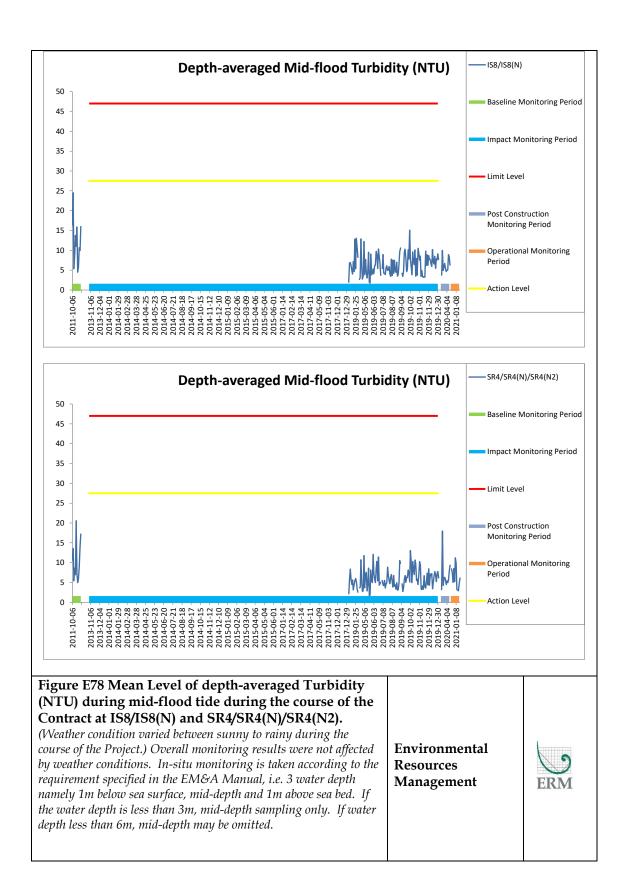



Figure E76 Mean Level of depth-averaged Turbidity (NTU) during mid-flood tide during the course of the Contract at CS(Mf)3/CS(Mf)3(N) and CS(Mf)5.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.







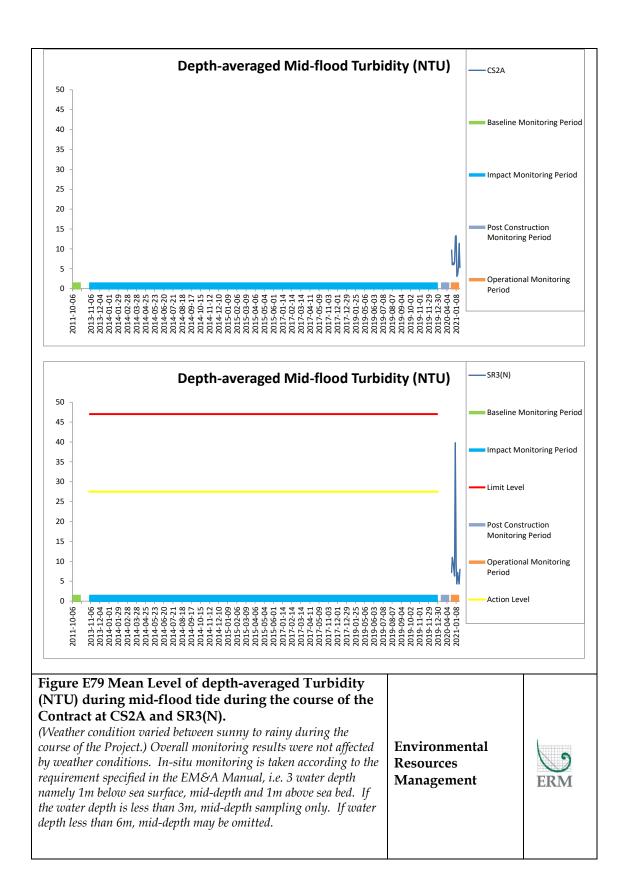

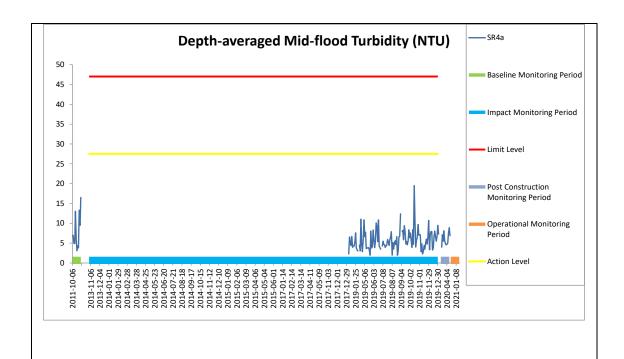


Figure E80 Mean Level of depth-averaged Turbidity (NTU) during mid-flood tide during the course of the Contract at SR4a.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



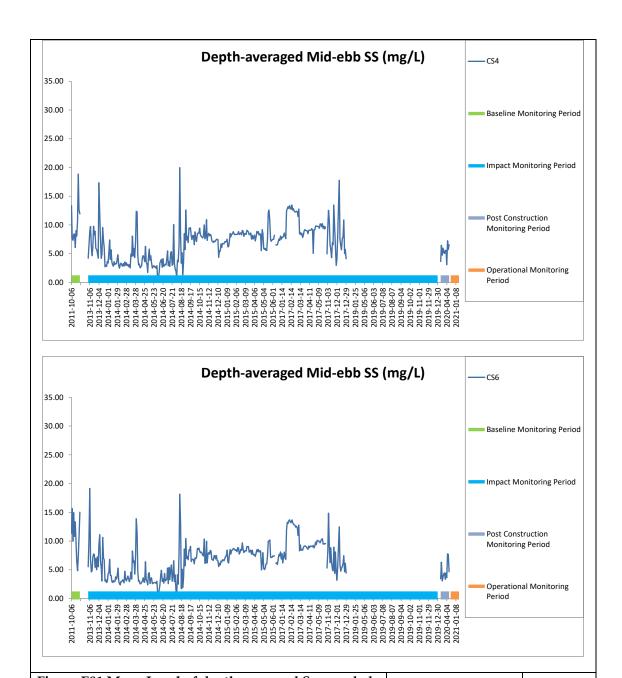


Figure E81 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at CS4 and CS6.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



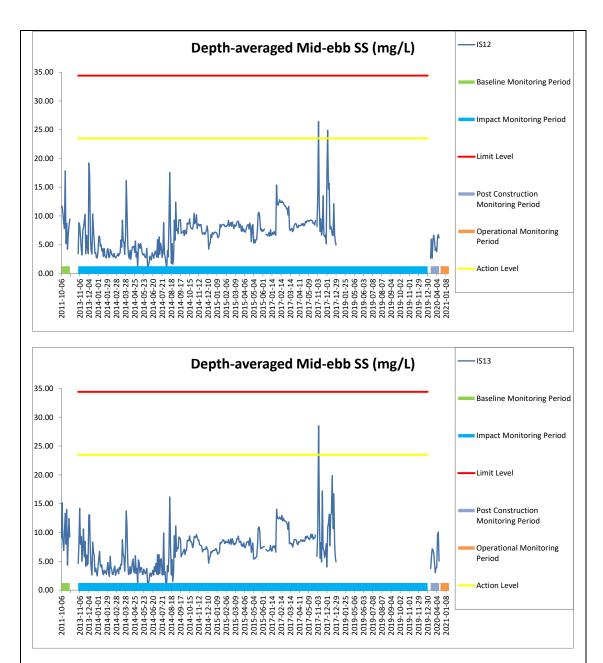


Figure E82 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at IS12 and IS13.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



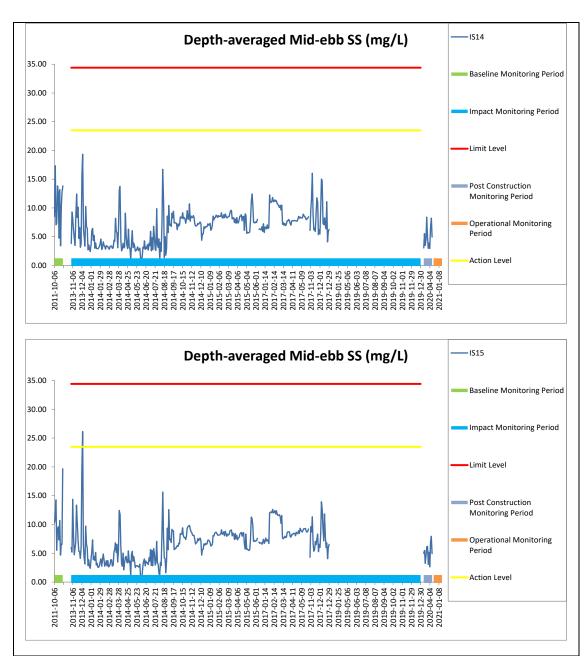


Figure E83 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at IS14 and IS15.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



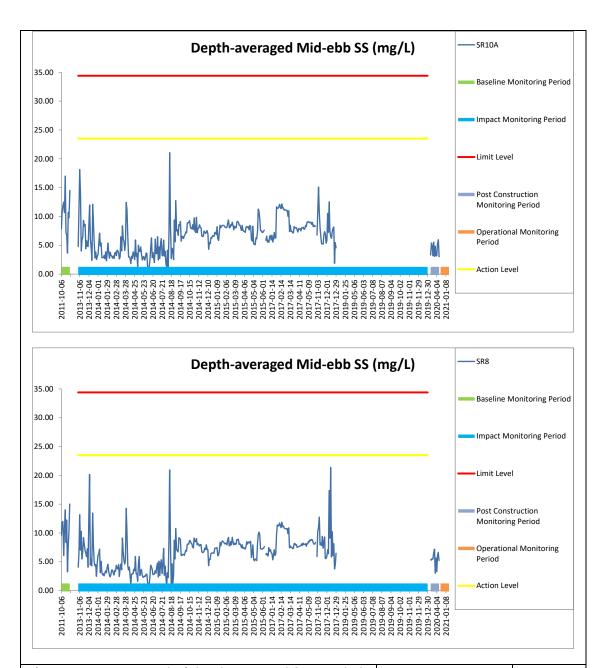


Figure E84 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at SR10A and SR8.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



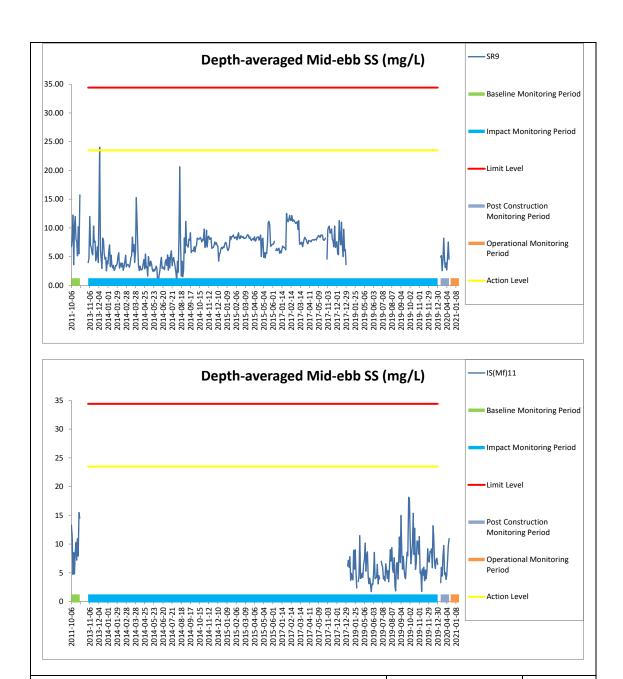


Figure E85 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at SR9 and IS(Mf)11.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



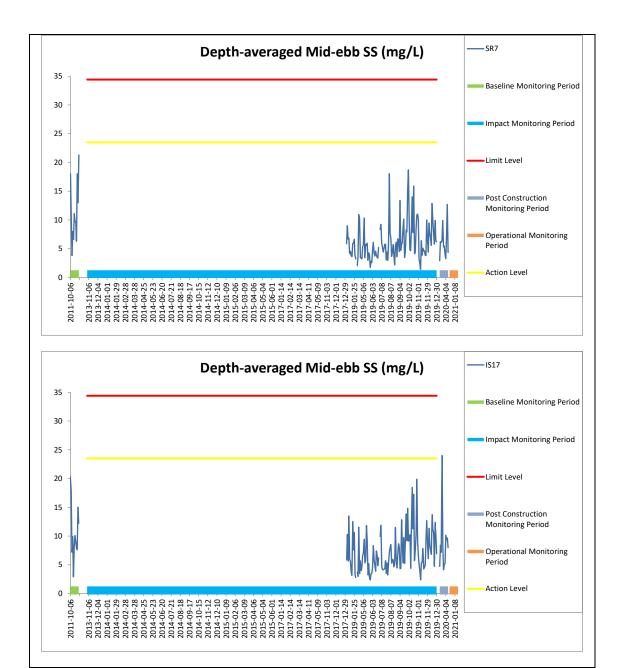
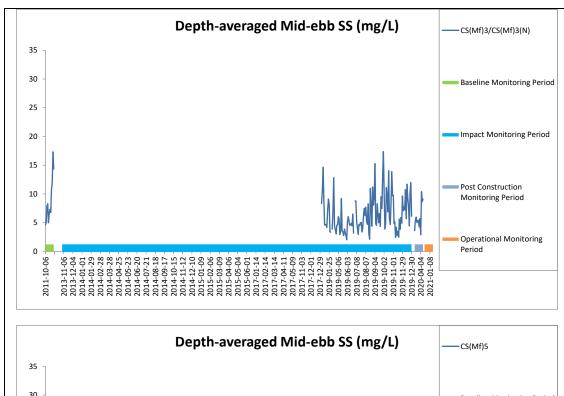


Figure E86 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at SR7 and IS17.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.





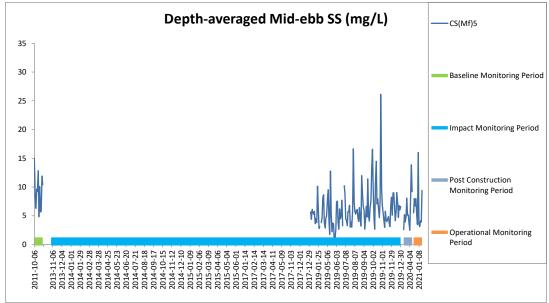


Figure E87 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at CS(Mf)3/CS(Mf)3(N) and CS(Mf)5.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



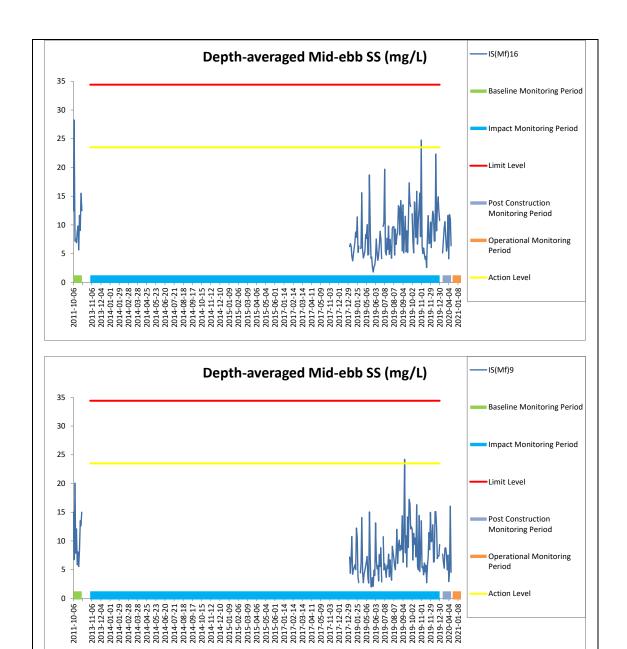


Figure E88 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at IS(Mf)16 and IS(Mf)9.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



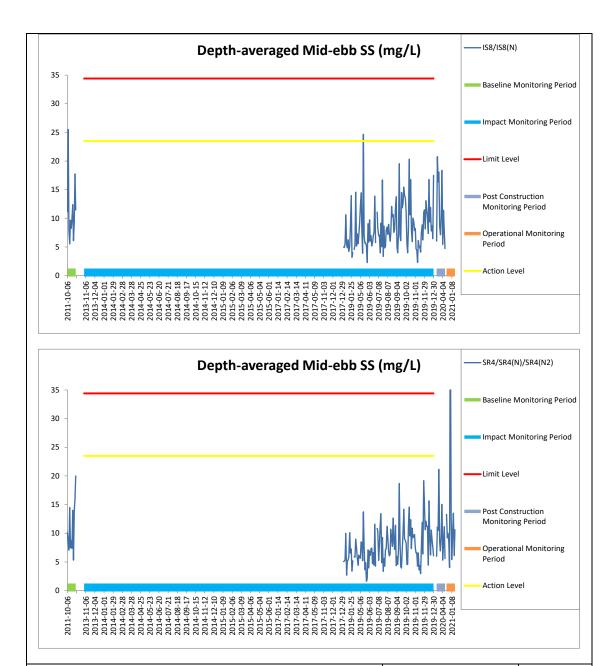


Figure E89 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at IS8/IS8(N) and SR4/SR4(N)/SR4(N2).

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



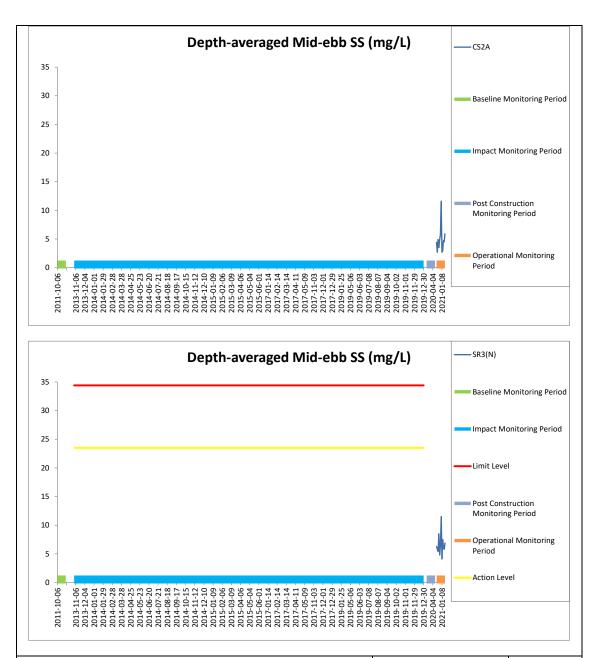


Figure E90 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at CS2A and SR3(N).

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



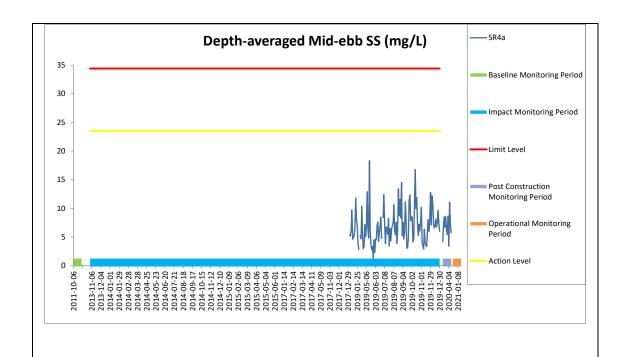


Figure E91 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-ebb tide during the course of the Contract at SR4a.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



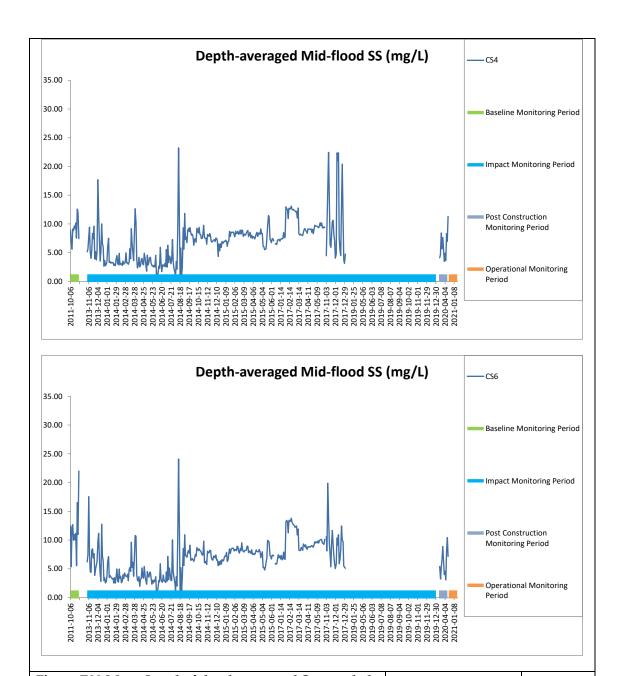


Figure E92 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at CS4 and CS6.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



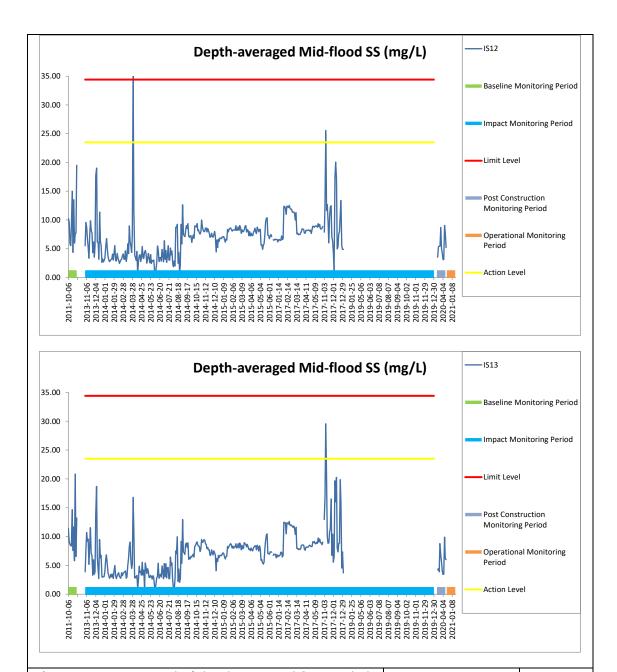


Figure E93 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at IS12 and IS13.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



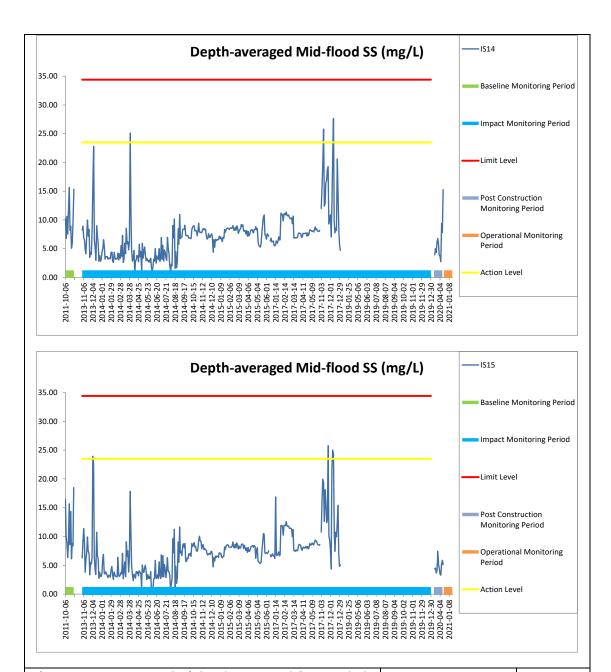


Figure E94 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at IS14 and IS15.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



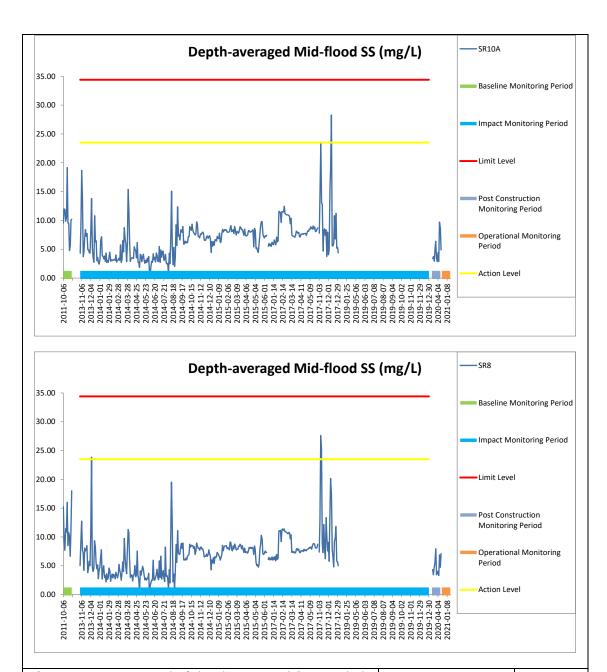


Figure E95 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at SR10A and SR8.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



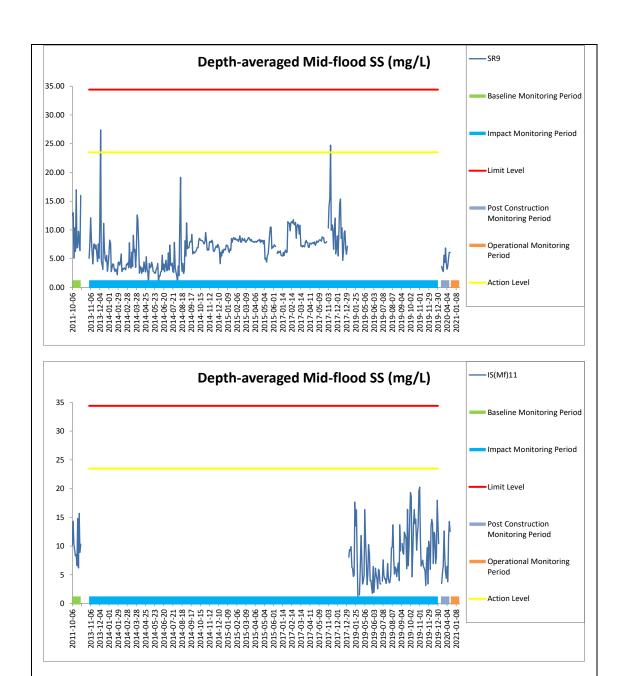


Figure E96 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at SR9 and IS(Mf)11.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



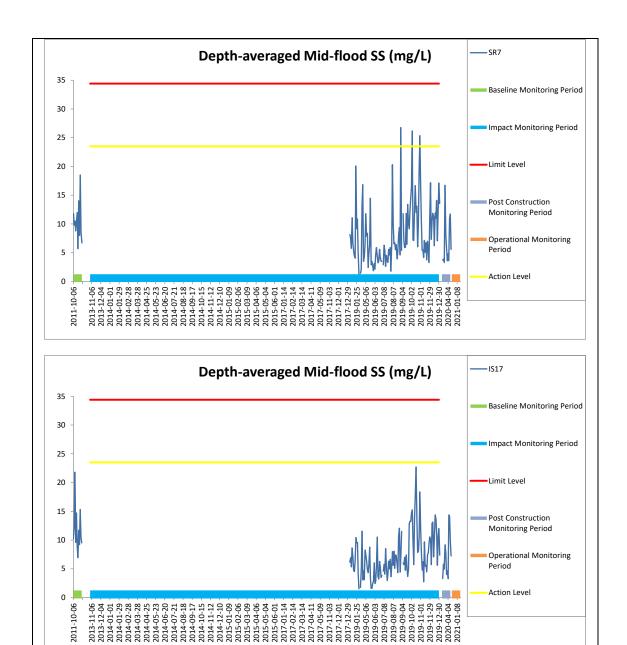
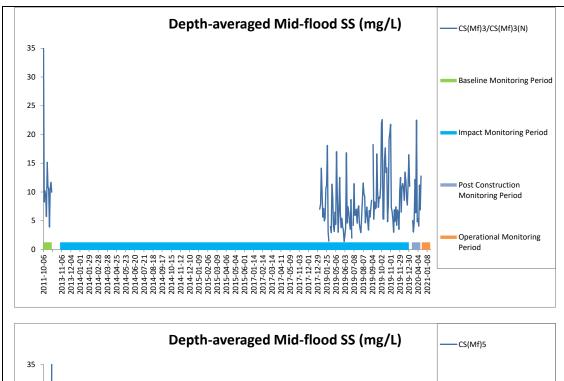


Figure E97 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at SR7 and IS17.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.





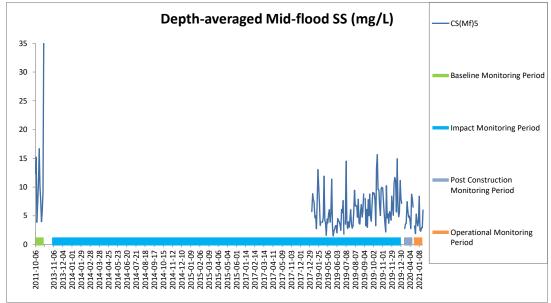


Figure E98 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at CS(Mf)3/CS(Mf)3(N) and CS(Mf)5.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



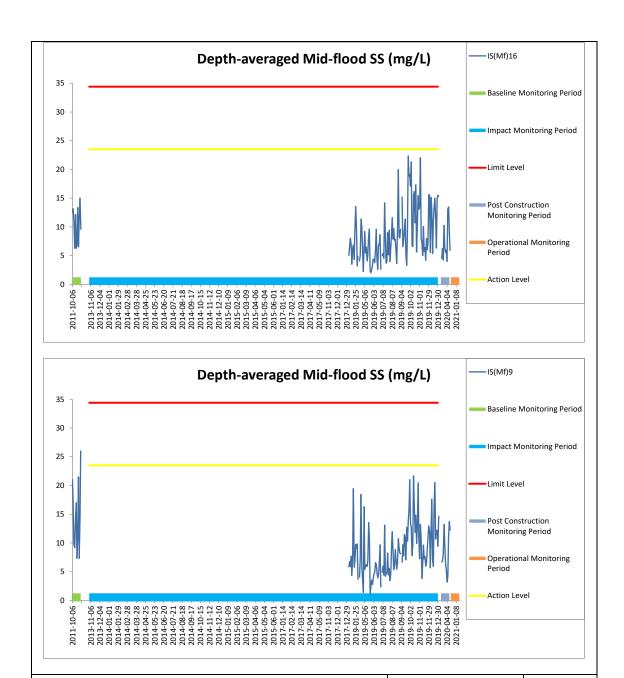


Figure E99 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at IS(Mf)16 and IS(Mf)9.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



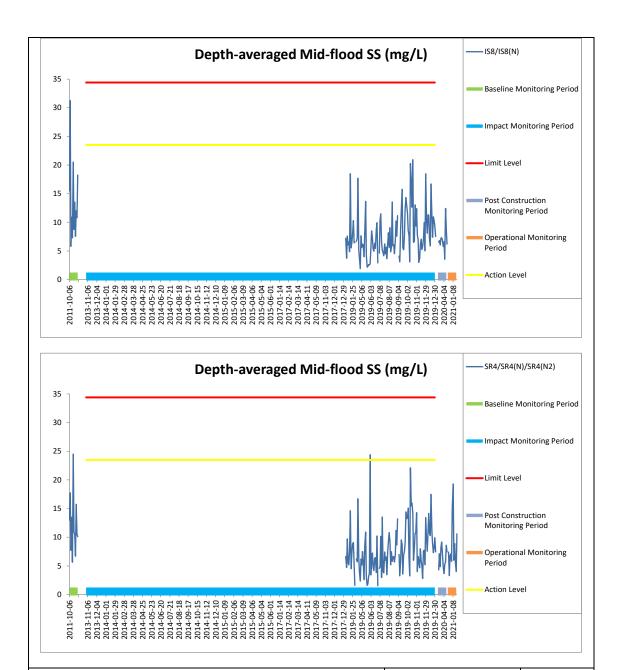


Figure E100 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at IS8/IS8(N) and SR4/SR4(N)/SR4(N2).

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



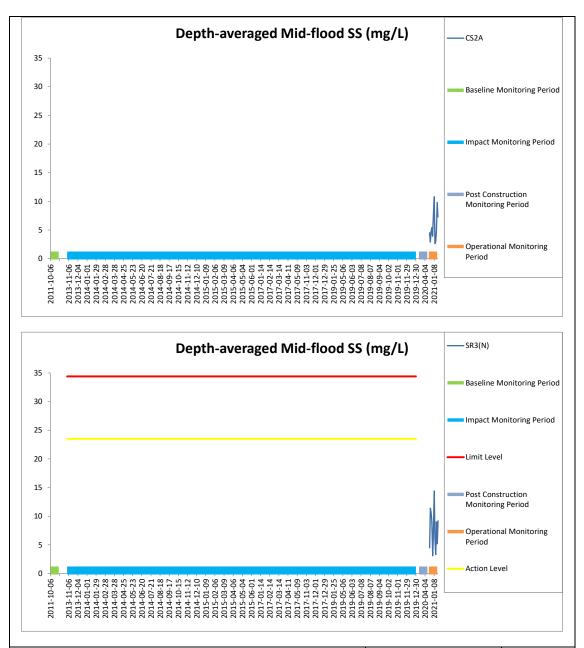


Figure E101 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at CS2A and SR3(N).

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.



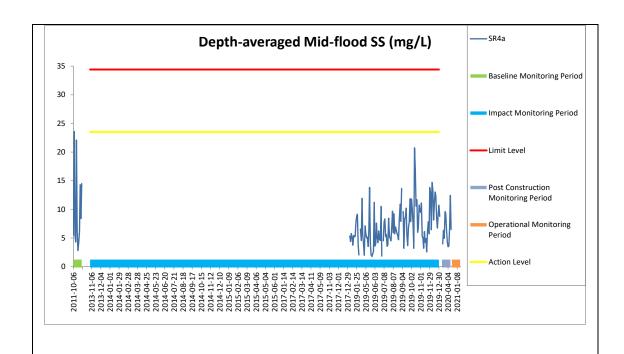


Figure E102 Mean Level of depth-averaged Suspended Solids (mg/L) during mid-flood tide during the course of the Contract at SR4a.

(Weather condition varied between sunny to rainy during the course of the Project.) Overall monitoring results were not affected by weather conditions. In-situ monitoring is taken according to the requirement specified in the EM&A Manual, i.e. 3 water depth namely 1m below sea surface, mid-depth and 1m above sea bed. If the water depth is less than 3m, mid-depth sampling only. If water depth less than 6m, mid-depth may be omitted.

